



FPA-18/CZP18CD(O)	18,000 BTU/H(208/230V)	Wall Mounted Heat Pump System
Location: _____	Approval: _____	
Engineer: _____	Date: _____	
Submitted to: _____	Construction: _____	
Submitted by: _____	Unit #: _____	
Reference: _____	Drawing #: _____	

Set Model
 Indoor unit model FPA-18
 Outdoor unit model CZP18CD(O)

Certified

AHRI 

UL 



SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230, 1, 60
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity	(A)	17.0
Max.fuse	(A)	25.0
Connection wiring	14AWG*4 Stranded, unshielded	
Cooling		
Rated Capacity	(Btu/h)	18000
Capacity Range	(Btu/h)	6200~18000
Power Input (Max)	(W)	1450
Rated current	(A)	6.29
SEER	(Btu/W)	21.5
EER	(Btu/W)	12.5

Heating at 47F		
Rated Capacity	(Btu/h)	20000
Capacity Range	(Btu/h)	8100~20000
Power Input (Max)	(W)	2010
Rated current	(A)	8.51
HSPF4	(Btu/W)	10.50
HSPF5	(Btu/W)	8.50
COP	W/W	2.92

Heating at 17F		
Max Capacity	(Btu/h)	14200

REFRIGERANT PIPE DATA

Design pressure	(PSIG)	550/340
Refrigerant Type	(Oz)	R410A/56.44
Refrigerant precharge	(ft)	25.0
	(m)	7.6
Additional charge for each ft	(oz/ft)	0.16
	(g/ft)	15
Liquid side/ Gas side	(inch)	1/4" / 1/2"
	(mm)	6.35/12.7
Max. pipe length	(ft)	98.0
	(m)	30.0
Max. difference in level	(ft)	66.0
	(m)	20.0
Connection method	(Flared)	

INDOOR UNIT DATA

Indoor fan motor		
Type	Cross-Flow	
Model	ZKFN-90-8-1	
Qty	1	
Input	(W)	96.0
RLA	(A)	-
LRA	(A)	---
Winding Resistance	(Ω)	---
Capacitor	(uF)	---
Speed(Hi/Mi/Lo)	(r/min)	950/850/750
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo)	(CFM)	548.24/485.29/420.59
Indoor noise level (Hi/Med/Lo)	[dB(A)]	48/44.5/41
Dehumidification	(Pint/H)	---
Indoor unit		
Dimension (WxDxH)	(inch)	42.05x26.57x9.25
	(mm)	1068x675x235
Packing(WxDxH)	(inch)	45.08x29.72x12.52
	(mm)	1145x755x318
Net/Gross weight	(lbs.)	57.10/68.34
	(kg)	25.9/31



OUTDOOR UNIT DATA

Compressor		
Type	KSN140D58UFZ	
Model	ROTARY	
Brand	GMCC	
Capacity	(Btu/h)	14723.39115
Input	(W)	1090
Rated current (RLA)	(A)	-
Refrigerant oil/oil charge	(ml)	-
Throttle	Capillary +EXV	
Outdoor fan motor		
Model	ZKFN-80-8-3	
Qty	1	
Input	(W)	---
RLA	(A)	---
Speed	(r/min)	810/720
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	1764.70
Outdoor noise level	[dB(A)]	58
Outdoor unit		
Dimension (WxDxH)	(inch)	35.04x13.46x26.50

Indoor(cooling/ heating)	(Deg. °F)	60~90 / 32~86
	(Deg. °C)	16~32 / 0~30
Outdoor(cooling/heating)	(Deg. °F)	-13~122 / -13~75
	(Deg. °C)	-25~50 / -25~24
Application area	(sq.ft)	258.33~376.74
	(m2)	24~35


Packing (W×D×H)	(mm)	890x342x673
	(inch)	39.17x15.67x29.13
Net/ Gross weight	(mm)	995x398x740
	(lbs.)	95.02/101.85
	(kg)	43.1/46.2

Indoor unit dimension

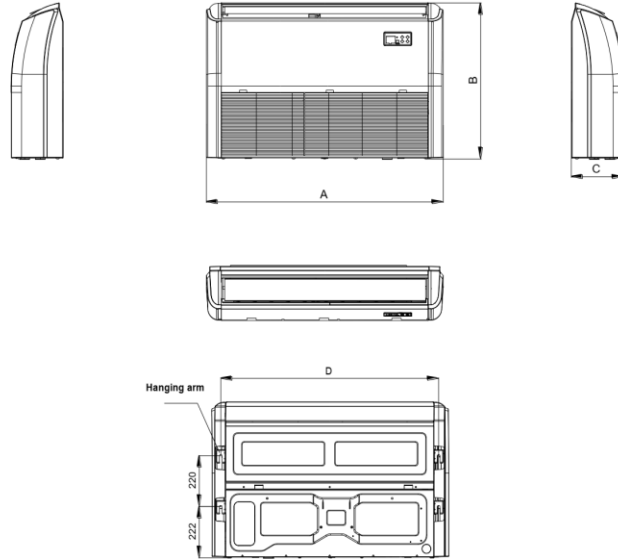

Capacity (Btu/h)	Unit	A	B	C	D
18K / 24K	mm	1068	675	235	983
	inch	42.05	26.57	9.25	38.70
36K	mm	1285	675	235	1200
	inch	50.59	26.57	9.25	47.24
48K/60K	mm	1650	675	235	1565
	inch	64.96	26.57	9.25	61.61

Outdoor unit dimension

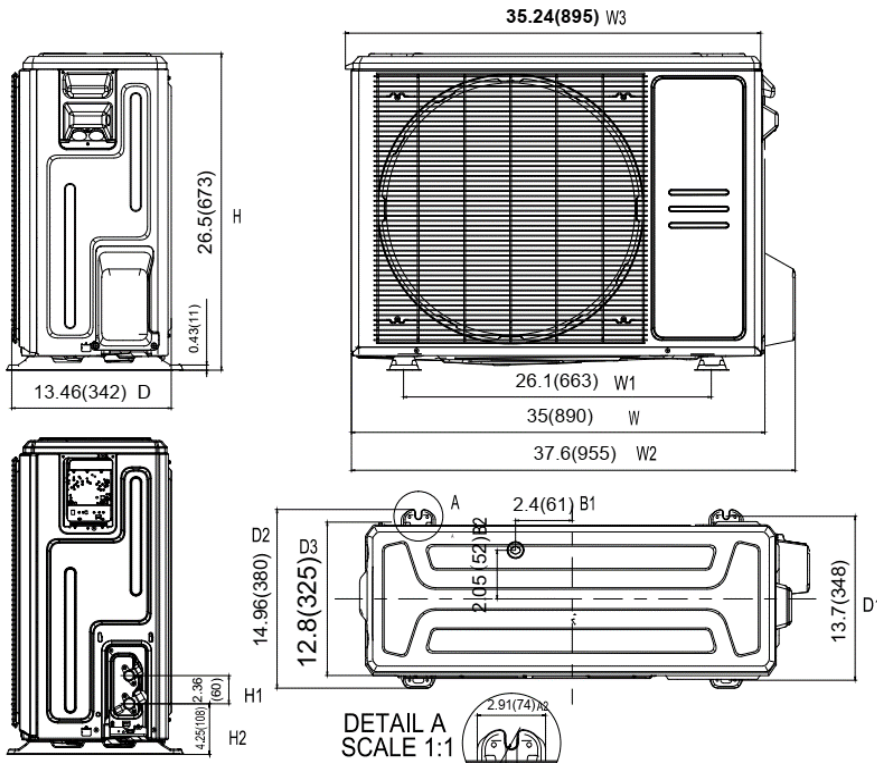

0.47(12)A1

General Features

Wired controller(optional)

Weekly-time wired controller(optional)

Central controller

Long distance Alarm and ON/OFF controller(optional)

Build-in pump(optional)

3D airflow

Extended Performance Data

