

96% Gas Furnace




Features

- ❖ Durable aluminized steel tubular heat exchanger.
- ❖ Stainless-steel secondary heat exchanger.
- ❖ Two-stage gas valve.
- ❖ Hot surface igniter.
- ❖ Quiet multi-speed ECM circulator blower motor.
- ❖ Control board with self-diagnostics and Low-voltage terminal block.
- ❖ Natural gas and propane (LP) convertible.
- ❖ Designed for multi-position installation: Upflow, horizontal.
- ❖ Industry-standard cabinet sizes for easy replacement, installation and add-on cooling.
- ❖ Convenient left or right connection for gas and electric service.
- ❖ Removable bottom for side or bottom return applications.



Component Location

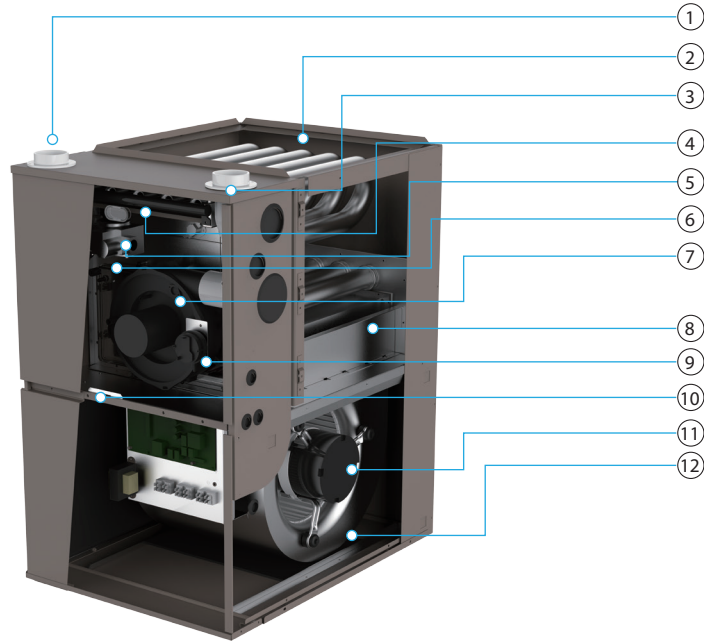

- | | | | |
|--------------------------|-------------------|-----------------------------|------------------------------------|
| 1. Air inlet pipe joint | 4. Burner | 7. Induced blower and motor | 10. Blower door interlock switch |
| 2. First heat exchanger | 5. Gas valve | 8. Second heat exchanger | 11. ECM motor of circulator blower |
| 3. Air outlet pipe joint | 6. Condensate pan | 9. Pressure switch | 12. Circulator blower |

Specifications

Model (MGH93M)	060B3B	080B3B	080C4B	100C5B	100D5B	120D5B
Configuration	Upflow/horizontalflow(left-right)					
Heating Efficiency(AFUE)	96%					
Dimensions (HxWxD)(in.)	28-1/2x17-1/2x33-3/4		28-1/2x21x33-3/4		28-1/2x24-1/2x33-3/4	
Net/Gross Weight(lbs)	135.5/147.5	141/153	156/169.6	162/173	169.6/181.7	174/186



Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.