

Job: _____
Location: _____
Schedule No.: _____
System Designation: _____

Engineer: _____
Architect: _____
Date: _____
For: Reference Approval Review Construction

FEATURES

- High Energy Efficiency
- Compatible
- Comfortable & Quiet
- Flexible choice of controller
- Safe & High Reliability
- Flexible installation

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹	Btu/h	58,000
EER (Btu/w*h)	Ducted	11.7
SEER (Btu/w*h)	Ducted	18

ELECTRICAL DATA

Power Supply	V/Hz/Ph	208/230V, 1Ph, 60Hz
Min. Circuit Ampacity	A	36.5
Max. Overcurrent Circuit Protection.	A	60.0
Compressor RLA	A	27.2
No. of Compressors	/	1
Outdoor Fan Power Input	Hp	1/3
Outdoor Fan FLA	A	2.5

GENERAL DATA

Sound Pressure Level	dB(A)	79
Outdoor Fan Air Volume	m ³ /h(CFM)	6,929(4100)
Refrigerant type	/	R410A
Factory refrigerant charge	Oz	163

DIMENSIONS

Unit Dimensions mm(in.)	Height	843(33-3/16)
	Width	740(29-1/8)
	Depth	740(29-1/8)
Liquid Pipe Connection	mm(in.).	Φ9.52 (Φ3/8)
Gas Pipe Connection	mm(in.).	Φ22.2 (Φ7/8)
Net Weight	kg(lbs.)	87 (192)
Shipping Weight	kg(lbs.)	92 (203)




OPTIONAL ACCESSORIES

1. Cooling and Heating Capacity data is rated at the following conditions:

Cooling: 80.0°FDB / 67.0°FWB Indoor, 95°FDB Outdoor;

DIMENSION in.(mm)

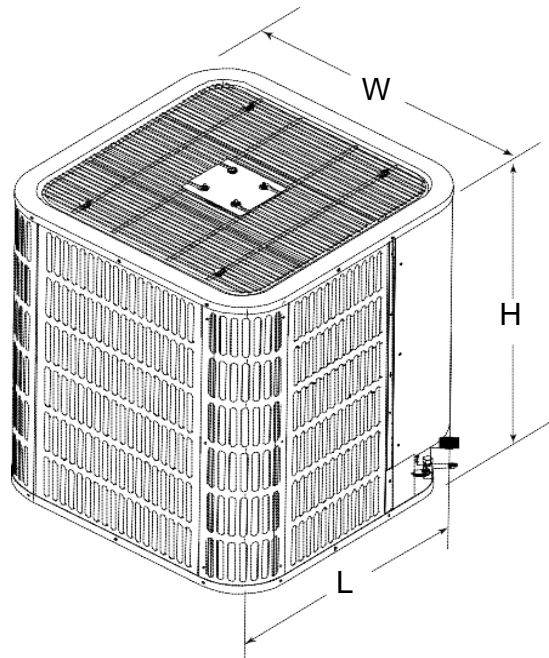

Model name	Dimension		
	"H" mm(in)	"W" mm(in)	"L" mm(in)
MRR60-410	843(33-3/16)	740(29-1/8)	740(29-1/8)