



Submittal

Split System Cooling

LUC4-36-15


Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit # : _____
Drawing # : _____



Note: "Graphics in this document are for representation only. Actual model may differ in appearance."

Unit dimension

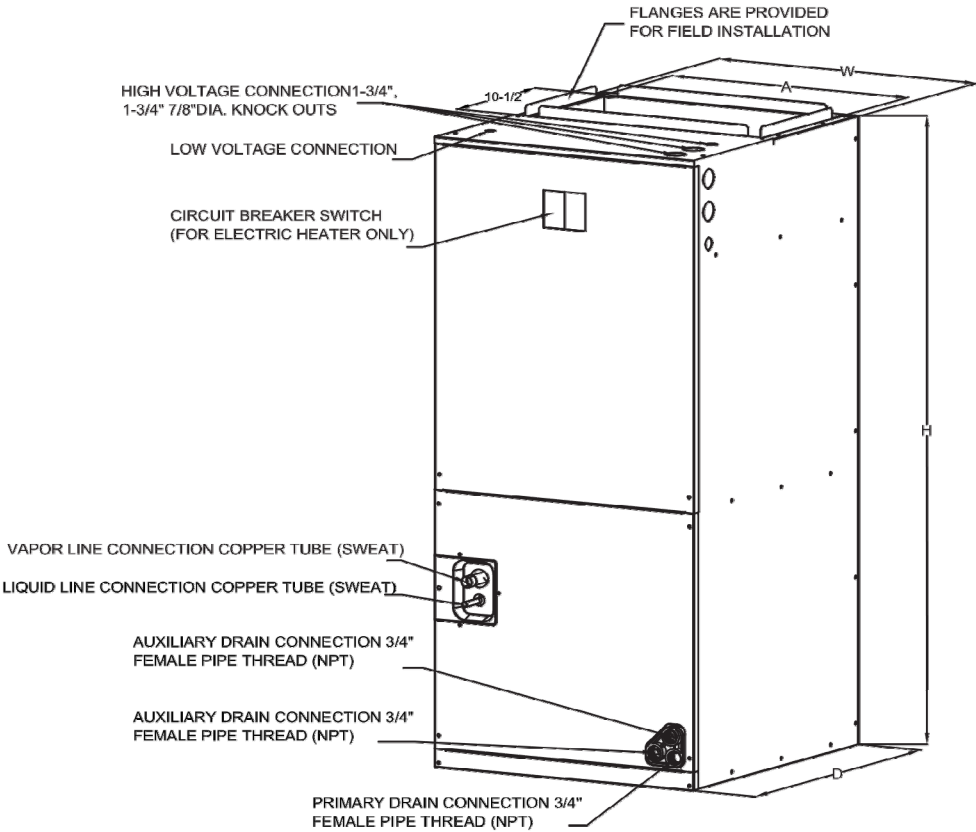

UNIT DIMENSION	18K	24K	30K	36K	42K	48K	60K
Height (in.)	45-3/4	45-3/4	45-3/4	45-3/4	45-3/4	53-1/8	53-1/8
Width (in.)	19-2/3	19-2/3	19-2/3	19-2/3	19-2/3	22	22
Depth (in.)	22	22	22	22	22	24	24

Specification

Unit model			LUC4-36-15
Power supply	Voltage range	V/Ph/Hz	208~230V/1N/60Hz
Cooling	Capacity	Btu/h	33000
Indoor external static pressure		Pa	125
Throttle type			piston
Indoor fan motor	Type		ECM
	Output	W	373
	Capacitor	μF	/
	rate current	A	3.8
	Speed (Hi/Me/Lo)	rpm	/
blower	Diameter	in	12.3125
	Width	in	12.90625
Indoor air flow		CFM	1042
Indoor noise level		dB(A)	56
Outdoor unit	Dimension(W×D×H)	in	19-2/3×45-3/4×22
		mm	500×1162×560
	Packing (W×D×H)	in	22-5/6×47-5/8×25-3/5
		mm	580×1210×650
	Net/Gross weight	kg	61/66
		lbs	134/146

Outdoor Unit	Indoor Unit	Cooling Capacity	EER2	SEER2
BAR4-36-15	LUC4-36-15	33000	11.7	14.3

Electric Heater Kits

NO.	Kit#	Description	Ref. Air Handler use
1	05	5kW Heat Strip	18,24,30,36,42,48,60
2	08	7.5kW Heat Strip	18,24,30,36,42,48,60
3	10	10kW Heat Strip	18,24,30,36,42,48,60
4	05B	Circuit Breaker, 5kW Heat Strip	18,24,30,36,42,48,60
5	08B	Circuit Breaker, 7.5kW Heat Strip	18,24,30,36,42,48,60
6	10B	Circuit Breaker, 10kW Heat Strip	18,24,30,36,42,48,60
7	15B	Circuit Breaker, 15kW Heat Strip	36,42,48,60
8	20B	Circuit Breaker, 20kW Heat Strip	36,42,48,60

MCA/MOP DATA

Heat Kit Model	Air Handler Model	(kW)Electric Heat	MIN. Circuit Ampacity		MAX.Fuse or Breaker (HACR) Ampacity	
			240	208	240	208
05(B)	18	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
05(B)	24	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
05(B)	30	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
05(B)	36	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
15B		15	64	56	30+60	30+60
20B		20	84	72	60+60	60+60
05(B)	42	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
15B		15	64	56	30+60	30+60
20B		20	84	72	60+60	60+60
05(B)	48	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
15B		15	64	56	30+60	30+60
20B		20	84	72	60+60	60+60
05(B)	60	5	21	18	30	30
08(B)		7.5	32	28	50	50
10(B)		10	42	36	60	60
15B		15	64	56	30+60	30+60
20B		20	84	72	60+60	60+60

ComfortStar®

12201 N W 107th Avenue
Miami, FL 33178
1.866.524.9898 Toll Free
305.500.9898 Office
305.500.9896 Fax
<http://www.comfortstarusa.com>



The AHRI mark indicates Comfortstar participating in the AHRI Certification program. Visit ahridirectory.org for verification of individual certified products. Comfortstar reserves the right to change design and specs without notice. Comfortstar has a policy of update the data continuously. We are committed to using environmentally conscious print practices.

LUC4-36-15 11 Nov 2022
Supersedes LUC4-36-15 (Nov.2022)

© 2022 ComfortStar