

SUBMITTAL DATA SHEET



CPA-18B/CZP18CD(O)	18,000 BTU/H(208/230V) Wall Mounted Heat Pump System
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

Set Model
 Indoor unit model CPA-18B
 Outdoor unit model CZP18CD(O)

Certified

AHRI 

UL 




SYSTEM PERFORMANCE DATA		
Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230, 1, 60
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity	(A)	17.0
Max.fuse	(A)	25.0
Connection wiring		14AWG*4 Stranded, unshielded
Cooling		
Rated Capacity	(Btu/h)	17000
Capacity Range	(Btu/h)	5800~18000
Power Input (Max)	(W)	1455
Rated current	(A)	6
SEER2	(Btu/W)	20.0
EER2	(Btu/W)	12.5
Heating at 47F		
Rated Capacity	(Btu/h)	20000
Capacity Range	(Btu/h)	5000~20000
Power Input (Max)	(W)	1880
Rated current	(A)	7.90
HSPF2-4	(Btu/W)	10.6
HSPF2-5	(Btu/W)	8.2
COP	W/W	3.12
Heating at 17F		
Max Capacity	(Btu/h)	14100

REFRIGERANT PIPE DATA		
Design pressure	(PSIG)	550/340
Refrigerant Type	(Oz)	R410A/56.44
Refrigerant precharge	(ft)	25.0
	(m)	7.6
Additional charge for each ft	(oz/ft)	0.16
	(g/ft)	15
Liquid side/ Gas side	(inch)	1/4" / 1/2"
	(mm)	6.35/12.7
Max. pipe length	(ft)	98.0
	(m)	30.0
Max. difference in level	(ft)	66.0
	(m)	20.0
Connection method		(Flared)
Indoor(cooling/ heating)	(Deg. °F)	60~90 / 32~86
	(Deg. °C)	16~32 / 0~30
Outdoor(cooling/heating)	(Deg. °F)	-22~122 / -13~75
	(Deg. °C)	-30~50 / -25~24
Application area	(sq.ft)	258.33~376.74
	(m2)	24~35

INDOOR UNIT DATA		
Indoor fan motor		
Type		Cross-Flow
Model		ZKFN-160-8-1-2
Qty		1
Input	(W)	90.0
RLA	(A)	--
LRA	(A)	--
Winding Resistance	(Ω)	--
Capacitor	(uF)	--
Speed(Hi/Mi/Lo)	(r/min)	850/700/450
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	529.41/450.00/370.59
Indoor noise level (Hi/Med/Lo)	[dB(A)]	43/40.5/38
Dehumidification	(Pint/H)	--
Indoor unit		
Dimension (WxDxH)	(inch)	34.65x28.53x8.27
	(mm)	880x674x210
Packing(WxDxH)	(inch)	42.13x28.54x11.02
	(mm)	1070x725x280
Net/Gross weight	(lbs.)	54/66
	(kg)	25.1/30.4


OUTDOOR UNIT DATA		
Compressor		
Type		KSN140D58UFZ
Model		ROTARY
Brand		GMCC
Capacity	(Btu/h)	14723.39115
Input	(W)	1090
Rated current (RLA)	(A)	-
Refrigerant oil/oil charge	(ml)	-
Throttle		Capillary +EXV
Outdoor fan motor		
Model		ZKFN-80-8-3
Qty		1
Input	(W)	--
RLA	(A)	--
Speed	(r/min)	810/720
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	1764.70
Outdoor noise level	[dB(A)]	58
Outdoor unit		
Dimension (W×D×H)	(inch)	35.04x13.46x26.50
	(mm)	890x342x673
Packing (W×D×H)	(inch)	39.17x15.67x29.13
	(mm)	995x398x740
Net/ Gross weight	(lbs.)	95.02/101.85
	(kg)	43.1/46.2

Indoor unit dimension

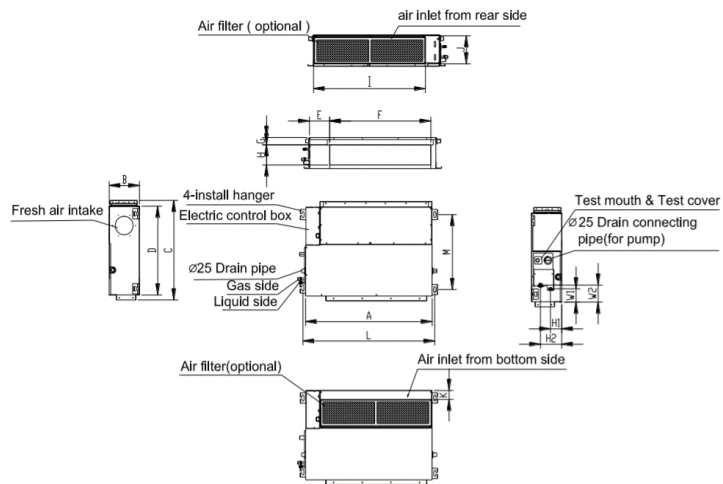

Model (KBtuh)	unit	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
9/12	mm	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84
	inch	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3
18	mm	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112
	inch	34.6	8.3	26.5	23.6	5.5	27.8	2.0	5.4	30.8	7.5	1.6	36.2	20.0	3.1	5.8	3.5	4.4
24	mm	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155
	inch	43.3	9.8	30.5	27.6	5.5	36.5	2.0	6.9	39.4	9.0	0.2	44.9	23.5	3.1	5.9	5.1	6.1
36	mm	1360	249	774	700	140	1186	50	175	1261	228	5	1400	598	80	150	130	155
	inch	53.5	9.8	30.5	27.6	5.5	46.7	2.0	6.9	49.6	9.0	0.2	55.1	23.5	3.1	5.9	5.1	6.1
48	mm	1200	300	874	800	123	1044	50	227	1101	280	5	1240	697	80	150	185	210
	inch	47.2	11.8	34.4	31.5	4.8	41.1	2.0	8.9	43.3	11.0	0.2	48.8	27.4	3.1	5.9	7.3	8.3

Outdoor unit dimension

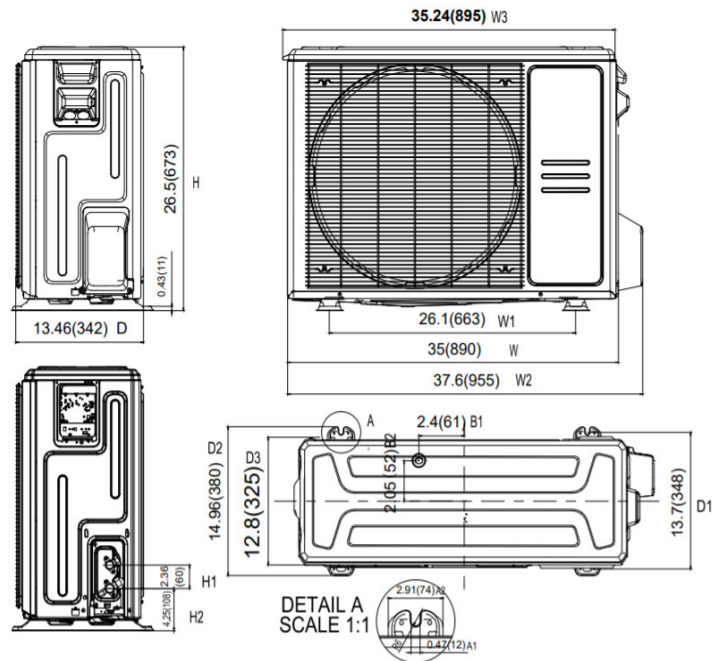

General Features

Wired controller
Weekly-time wired controller(optional)
Central controller
Long distance Alarm and ON/OFF controller
Build-in pump

Extended Performance Data