ComfortStar®

Submittal

Split System Cooling

CPH60CD(O)

Location:
Engineer:
Submitted to:
Submitted by:
Reference:

Approval:

Date:

Construction:

Unit #:

Drawing #:




Note: "Graphics in this document are for representation only. Actual model may differ in appearance."



ComfortStar®

Unit dimension

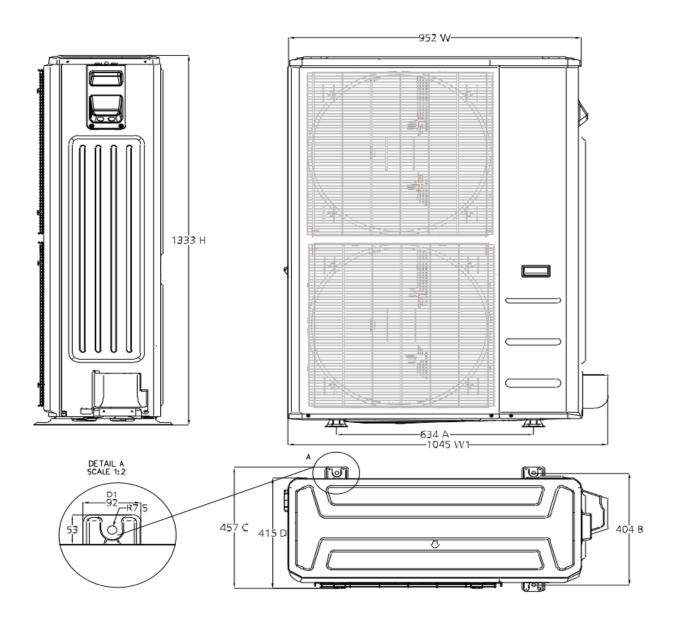

CPH60CD(0) 2



Specification

Outdoor unit model			CPH60CD(O)
Power supply	Rated	V, Ph, Hz	208/230, 1, 60
	Voltage range	V	187-253
MINIMUM CIRCUIT AMPACITY		Α	42
MAX.FUSE		Α	60
Compressor	Model		EAPQ440D1UMUA
	Туре		Rotary
	Brand		GMCC
	Capacity	Btu/h	13580
	Input power	W	3770
	Refrigerant oil	ml	VG75/1300
Outdoor fan motor	Model		ZKFN-85-8-22-5
	Qty.		2
	Input power	W	126
	Output power	W	85
	Speed	r/min	850/750/650
Outdoor air flow (Max.)		m3/h	7650
Outdoor air flow (Max.)		CFM	4500
Outdoor noise level (Sound pressure)		dB(A)	63.5
Throttle type			EXV
Outdoor unit	Dimension(W×D×H)	mm	952x415x1333
		inch	37.48x16.34x52.48
	Packing (W×D×H)	mm	1095x495x1480
		inch	43.11x19.49x58.27
	Net/Gross weight	kg	108.8/123.2
		lbs.	239.86/271.61
Refrigerant	Type/Charged	g	R410A/4800
		oz	R410A/169.32
Additional charge		g/m	65
		oz/ft	0.69
Design pressure		PSIG	550/340
Refrigerant piping	Liquid side/Gas side	mm	9.52/22
		inch	3/8" / 7/8"
	Max. pipe length	m	65
		ft	213.25
	Max. difference in level	m	30
		ft	98.42
Ambient temperature	Cooling	\mathbb{C}	- 30∼50
		F	-22 ∼122
	Heating	$^{\circ}$	-30∼24
		°F	-22 [~] 75

3 CPH60CD(O)



12201 N W 107th Avenue Miami, FL 33178 1.866.524.9898 Toll Free 305.500.9898 Office 305.500.9896 Fax http://www.comfortstarusa.com





The AHRI mark indicates Comfortstar participating in the AHRI Certification program. Visit ahridirectory.org for verification of individual certified products. Comfortstar reserves the right to change design and specs without notice. Comfortstar has a policy of update the data continuously.We are committed to using environmentally conscious print practices.

CPH60CD(O) 22th Feb 2023 Supersedes CPH60CD(O) (Feb.2023)