

CLA Series



HIGH EFFICIENCY - COOLING DUCTLESS MINI-SPLIT SYSTEMS



High Quality



DC motor
Energy-saving



Quiet
Operation



Auto - Restart

FEATURES:

- Gold fin protection
- Auto - Swing
- Auto - Restart
- Remote or wired control optional
- LCD display
- Dehumidification function
- High - efficiency filter
- Sleep mode function

UP TO
18 SEER2


INVERTER



Comfort... it's in our name

CLA Series

Comfort... it's in our name

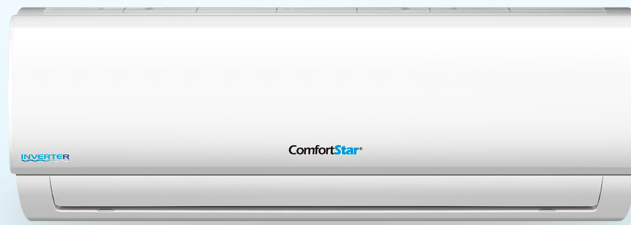

UP TO 18 SEER2

Indoor Unit Model Number			CLA12CA(I)	CLA12CD(I)	CLA18CD(I)	CLA24CD(I)
Outdoor Unit Model Number			CLA12CA(O)	CLA12CD(O)	CLA18CD(O)	CLA24CD(O)
Power supply		Ph-V-Hz	115V,1Ph,60Hz	220-230V,1Ph,60Hz	220-230V,1Ph,60Hz	220-230V,1Ph,60Hz
Cooling (Standard conditions)	Capacity (range)	Btu/h	12000	12000	18000	24000
	Input	W	1180	1180	1550	2060
	Current	A	10.4	5.2	6.8	9.1
	SEER	Btu/w	18.0	18.0	17	17
Compressor	Model		KSK103D33UEZ3	KSK103D33UEZ3	KSK103D33UEZ3	KTN150D30UFZA
	Type		ROTARY	ROTARY	ROTARY	Twin-ROTARY
	Brand		GMCC	GMCC	GMCC	GMCC
	Capacity	W	2035/3255	2035/3255	2035/3255	4730
	Input	W	325/826	325/826	325/826	1250
	Refrigerant oil/oil charge	ml	ESTER OILVG74 310	ESTER OILVG74 310	ESTER OILVG74 310	ESTER OILVG74 450
Indoor fan motor	Model		YKFG-15-4-28-1	YKFG-20-4-10L	YKFG-28-4-6-5	ZKFP-58-8-1-5
	Capacitor	uF	3	1.5	1.5	/
	Speed(Hi/Mi/Lo)	r/min	1180/950/750	1180/950/750	1200/1000/800	1200/1000/800
Indoor air flow (Hi/Mi/Lo)		m3/h	593/455/337	609/470/350	818/639/515	980/750/610
Indoor air flow (Hi/Mi/Lo)		CFM	348.82/267.65/198.24	358.24/276.47/205.88	481.18/375.88/302.94	576.47/441.18/358.82
Indoor noise level (Hi/Mi/Lo)		dB(A)	40/33.5/27.5	40/33.5/26	43.5/37/30.5	46/40.5/34
Indoor unit	Dimension(W*D*H)	mm	805x194x285	805x194x285	957x213x302	1040x220x327
	Dimension(W*D*H)	inch	31.69x7.64x11.22	31.69x7.64x11.22	37.68x8.39x11.89	40.94x8.66x12.87
	Packing (W*D*H)	mm	870x270x365	870x270x365	1035x295x385	1120x405x315
	Packing (W*D*H)	inch	34.25x10.63x14.37	34.25x10.63x14.37	40.75x11.61x15.16	44.09x15.94x12.40
	Net/Gross weight	kg	7.7/9.8	7.7/9.8	10.4/13.3	12.3/15.6
	Net/Gross weight	lb	16.98/21.61	16.98/21.61	22.93/29.32	27.12/34.39
Outdoor fan motor	Model		ZKFN-20-8-1	ZKFN-20-8-1	YKT-48-6-214-1	ZKFN-56-8-1
	Capacitor	uF	/	/	2.5	/
	Speed	r/min	850/600	850/600	810	900/700/600
Outdoor air flow		m3/h	1800	1800	2100	2500
Outdoor air flow		CFM	1058.82	1058.82	1235.29	1470.59
Outdoor noise level		dB(A)	55	55	56.5	56.5
Outdoor unit	Dimension(W*D*H)	mm	720x270x495	720x270x495	765x303x555	805x330x554
	Dimension(W*D*H)	inch	28.35x10.63x19.49	28.35x10.63x19.49	30.12x11.93x21.85	31.69x12.99x21.81
	Packing (W*D*H)	mm	835x300x540	835x300x540	887x337x610	915x370x615
	Packing (W*D*H)	inch	32.87x11.81x21.26	32.87x11.81x21.26	34.92x13.27x24.02	36.02x14.57x24.21
	Net/Gross weight	kg	22.3/24	21.1/22.8	26.5/28.9	30.1/32.6
	Net/Gross weight	lb	49.16/52.91	46.52/50.26	58.42/63.71	66.36/71.87
Refrigerant type	oz	R410A/0.51	R410A/0.51	R410A/0.82	R410A/1.06	
Additional charge per metre	g/m	15	15	15	30	
Additional charge for each ft	oz/ft	0.16	0.16	0.16	0.32	
Design pressure	PSIG	///	///	///	///	
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in)/12.7mm(1/2in)	6.35mm(1/4in)/12.7mm(1/2in)	6.35mm(1/4in)/12.7mm(1/2in)	9.52mm(3/8in)/15.9mm(5/8in)
	Max. refrigerant pipe length	m	25	25	30	30
	Max. refrigerant pipe length	ft	82.02	82.02	98.42	98.42
	Max. difference in level	m	10	10	20	20
	Max. difference in level	ft	32.81	32.81	65.62	65.62
Connection wiring	16AWG*4 Stranded, unshielded					
Thermostat type	Remote Control					
Room temperature	Indoor(cooling/ heating)	°C	17~32//	17~32//	17~32//	17~32//
	Indoor(cooling/ heating)	°F	///	///	///	///
	Outdoor(cooling/heating)	°C	0~50//	0~50//	0~50//	0~50//
	Outdoor(cooling/heating)	°F	///	///	///	///
Application area (Cooling Standard)	m2	16~23	16~23	23~33	28~41	
Application area (cooling standard)	sq.ft	172.22~247.57	172.22~247.57	247.57~355.21	301.39~441.32	

ComfortStar®

INVERTER



GOLDfin

12201 N. W. 107th Avenue | Medley, FL 33178

Toll Free: 1-866-524-9898 | Phone: 1-305-500-9898 | Fax: 1-305-500-9896

www.comfortstarusa.com

Email us: info@comfortstarusa.com