


Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	
Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
Indoor unit model	T1W12P



Power supply		V- Ph-Hz	208/230V, 1Ph, 60Hz
Cooling	Capacity (range)	Btu/hr	12000(4000~13200)
	Input	W	952(160~1200)
Heating	Capacity (range)	Btu/hr	12500(3700~12800)
MINIMUM CIRCUIT AMPACITY		A	3
MAX.FUSE		A	15
Indoor air flow (Hi/Mi/Lo)		CFM	311.76/282.35/247.06
Indoor noise level (Hi/Mi/Lo)		dB(A)	40.5/38.5/34.5
Indoor unit	Dimension(W*D*H)(body)	mm	1278x335x228
		inch	50.31x13.19x8.98
	Packing (W*D*H)(body)	mm	1463x571x575
		inch	57.60x22.48x22.64
	Net/Gross weight (body)	kg	20.5/37.6
		lb	45.19/82.89
Drainage water pipe dia		mm	ODΦ25mm
Design pressure		PSIG	550/340
Refrigerant piping	Liquid side/ Gas side	mm	6.35/12.7
		inch	1/4" / 1/2"
Thermostat type			Remote Control
Temperature	Cooling	℃	16~32
		℉	60~90
	Heating	℃	0~30
		℉	32~86
Connection wiring			14*4 AWG

Unit dimension

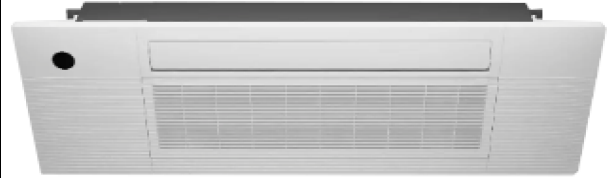