


Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	
Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
Indoor unit model	CHF18CD(I)



<b>Power supply</b>		V- Ph-Hz	208/230, 1, 60
<b>Cooling</b>	Capacity (range)	Btu/hr	18000(2000~19300)
<b>Heating</b>	Capacity (range)	Btu/hr	19000(6200~21000)
<b>MINIMUM CIRCUIT AMPACITY</b>		A	3
<b>MAX.FUSE</b>		A	15
<b>Indoor air flow (Hi/Mi/Lo)</b>		CFM	523.53/376.47/305.88
<b>Indoor noise level (Hi/Mi/Lo)</b>		dB(A)	46.5/43/32.5
<b>Indoor unit</b>	Dimension(W*D*H)(body)	mm	1017x242x319
		inch	40.04x9.53x12.56
	Packing (W*D*H)(body)	mm	1095x400x328
		inch	43.11x15.75x12.91
	Net/Gross weight (body)	kg	13.0/17.0
		lb	28.66/37.48
<b>Refrigerant piping</b>	Liquid side/ Gas side	mm	6.35/12.7
		inch	1/4" / 1/2"
<b>Thermostat type</b>			Wireless remote controller
<b>Temperature</b>	Cooling	°C	16~32
		°F	60~90
	Heating	°C	0~30
		°F	32~86
<b>Connection wiring</b>			16AWG*4 Stranded, unshielded

Unit dimension

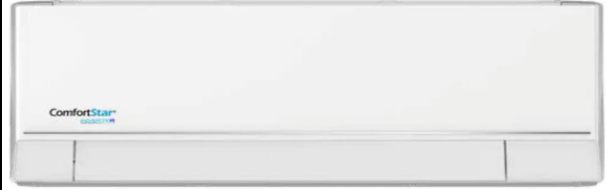