


Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	
Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
Indoor unit model	CPA-24



Power supply		V- Ph-Hz	208/230, 1, 60
Cooling	Capacity (range)	Btu/hr	24000(6100~28200)
Heating	Capacity (range)	Btu/hr	24600(11700~33000)
MINIMUM CIRCUIT AMPACITY		A	3.0
MAX.FUSE		A	15.0
Indoor air flow (Hi/Mi/Lo)		CFM	775.47/693.06/434.88
Indoor noise level (Hi/Mi/Lo)		dB(A)	44/41/37
Indoor unit	Dimension(W*D*H)(body)	mm	1100x774x249
		inch	43x30x10
	Packing (W*D*H)(body)	mm	1305x805x305
		inch	51x32x12
	Net/Gross weight (body)	kg	39.4/46.7
		lb	87/103
Refrigerant piping	Liquid side/ Gas side	mm	39.4/46.7
		inch	3/8" / 5/8"
Thermostat type			Wireless remote controller
Temperature	Cooling	°C	16~32
		°F	60~90
	Heating	°C	0~30
		°F	32~86
Connection wiring			16AWG*4 Stranded, unshielded

Unit dimension

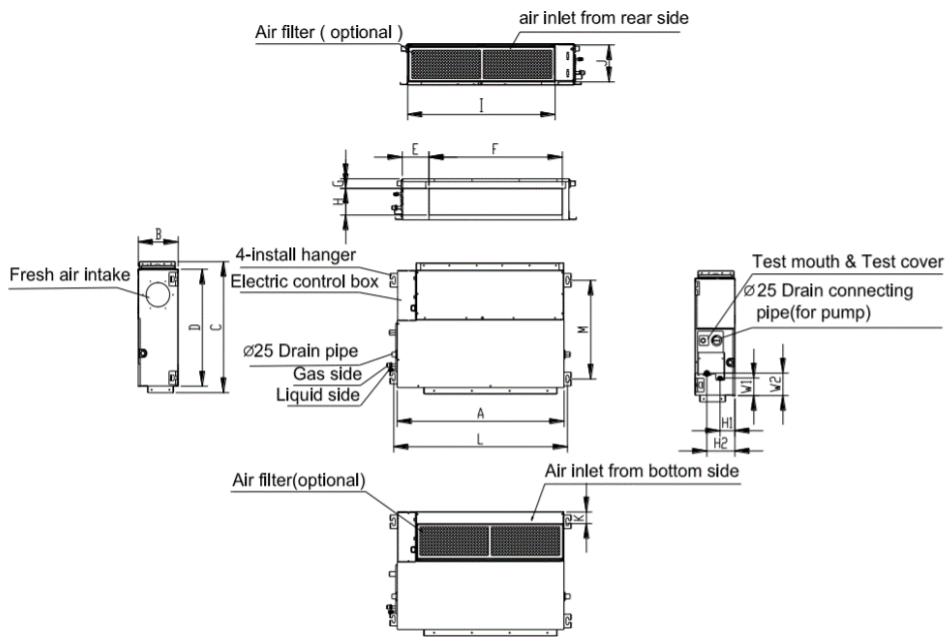

Model (KBTu/h)	unit	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
		9/12	mm	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140
	inch	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3
18	mm	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112
	inch	34.6	8.3	26.5	23.6	5.5	27.8	2.0	5.4	30.8	7.5	1.6	36.2	20.0	3.1	5.8	3.5	4.4
24	mm	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155
	inch	43.3	9.8	30.5	27.6	5.5	36.5	2.0	6.9	39.4	9.0	0.2	44.9	23.5	3.1	5.9	5.1	6.1
36	mm	1360	249	774	700	140	1186	50	175	1261	228	5	1400	598	80	150	130	155
	inch	53.5	9.8	30.5	27.6	5.5	46.7	2.0	6.9	49.6	9.0	0.2	55.1	23.5	3.1	5.9	5.1	6.1
48	mm	1200	300	874	800	123	1044	50	227	1101	280	5	1240	697	80	150	185	210
	inch	47.2	11.8	34.4	31.5	4.8	41.1	2.0	8.9	43.3	11.0	0.2	48.8	27.4	3.1	5.9	7.3	8.3