



Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	
Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
Indoor unit model	FPA-18

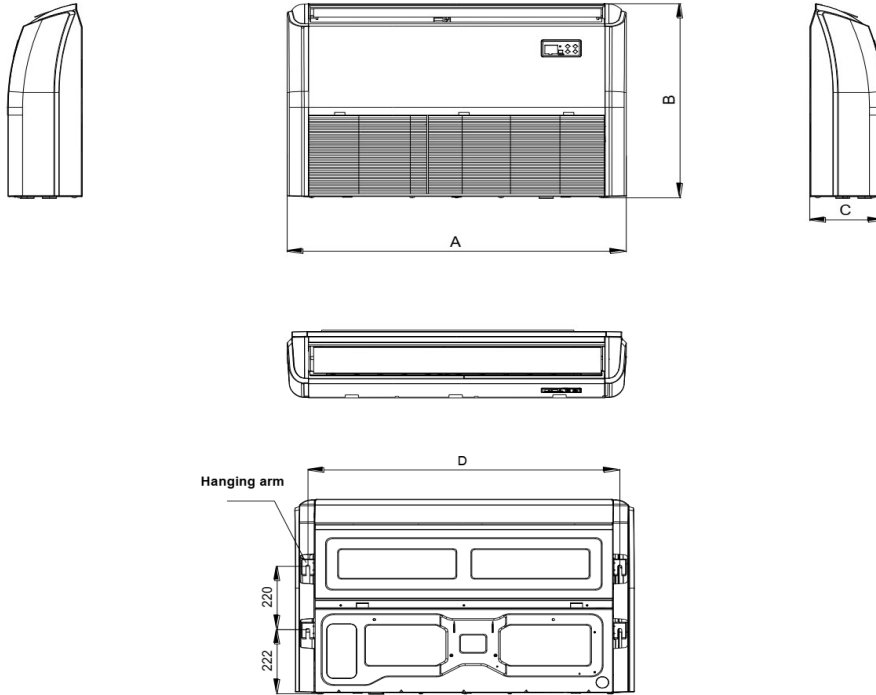

Power supply		V- Ph-Hz	208/230, 1, 60
Cooling	Capacity (range)	Btu/hr	18000(6200~18000)
Heating	Capacity (range)	Btu/hr	20000(8100~20000)
MINIMUM CIRCUIT AMPACITY		A	2
MAX.FUSE		A	15
Indoor air flow (Hi/Mi/Lo)		CFM	548.24/485.29/420.59
Indoor noise level (Hi/Mi/Lo)		dB(A)	45.5/43/39
Indoor unit	Dimension(W*D*H)(body)	mm	1068x675x235
		inch	42.05x26.57x9.25
	Packing (W*D*H)(body)	mm	1145x755x318
		inch	45.08x29.72x12.52
	Net/Gross weight (body)	kg	25.9/31
		lb	57.10/68.34
Drainage water pipe dia		mm	ODΦ25
Design pressure		PSIG	550/340
Refrigerant piping	Liquid side/ Gas side	mm	6.35/12.7
		inch	1/4" / 1/2"
Thermostat type			Wireless remote controller
Temperature	Cooling	℃	16~32
		℉	60~90
	Heating	℃	0~30
		℉	32~86
Connection wiring			16AWG*4 Stranded, unshielded

Unit dimension

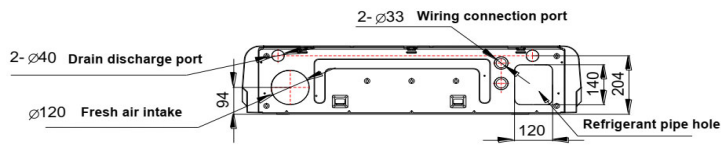

Capacity (Btu/h)	Unit	A	B	C	D
18K / 24K	mm	1068	675	235	983
	inch	42.05	26.57	9.25	38.70
36K	mm	1285	675	235	1200
	inch	50.59	26.57	9.25	47.24
48K/60K	mm	1650	675	235	1565
	inch	64.96	26.57	9.25	61.61