


Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	
Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
Indoor unit model	TIP-24



<b>Power supply</b>		V- Ph-Hz	208/230, 1, 60
<b>Cooling</b>	Capacity (range)	Btu/hr	24000(8130~26272)
<b>Heating</b>	Capacity (range)	Btu/hr	25000(10650~30000)
<b>MINIMUM CIRCUIT AMPACITY</b>		A	3
<b>MAX.FUSE</b>		A	15
<b>Indoor air flow (Hi/Mi/Lo)</b>		CFM	706/635/547
<b>Indoor noise level (Hi/Mi/Lo)</b>		dB(A)	49/46/43
<b>Indoor unit</b>	Dimension(W*D*H)(body)	mm	830x830x205
		inch	32.68x32.68x8.07
	Packing (W*D*H)(body)	mm	910x910x250
		inch	35.83x35.83x9.84
	Net/Gross weight (body)	kg	21.4/25.1
		lb	47.18/55.34
<b>Refrigerant piping</b>	Liquid side/ Gas side	mm	9.52/15.9
		inch	3/8" / 5/8"
<b>Thermostat type</b>			Wireless remote controller
<b>Temperature</b>	Cooling	℃	16~32
		℉	60~90
	Heating	℃	0~30
		℉	32~86
<b>Connection wiring</b>			16AWG*4 Stranded, unshielded

# Unit dimension

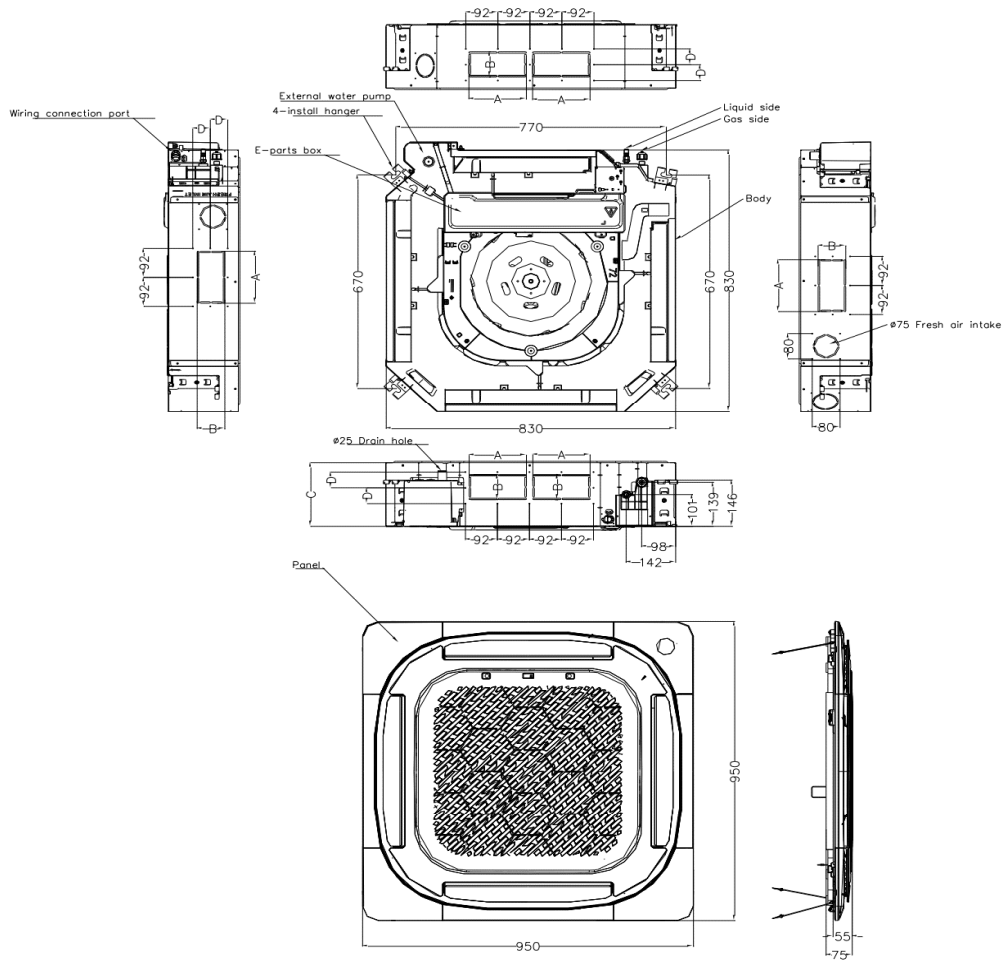

Capacity (Btu/h)	Unit	A	B	C	D
24K	mm	165	80	205	50
	inch	6.5	3.15	8.07	1.97
36K	mm	165	100	245	60
	inch	6.5	3.64	9.65	2.36
48K	mm	165	100	287	60
	inch	6.5	3.64	11.30	2.36