

SUBMITTAL DATA SHEET

ComfortStar®

7K

Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

Set Model 32HP07CD25 / 32HP07CD35

Certified

AHRI



UL



Performance data

Power supply	V-Ph-Hz	208/230V, 1Ph, 60Hz
Capacity	Btu/h	7200/7100
EER	W/W	13.1
Input	W	550/540
Current	A	3.0/3.3

Heating(PTC)

Capacity	Btu/h	7800/6300
Input(Heater)	W	2580/2150
Current	A	11.3/10.3

Heating(PTC) optional 3500W

Capacity	Btu/h	10900/8900
Input(Heater)	W	3500/2897
Current	A	15.3/13.7

Heating(Heat pump)(Standard conditions)

Capacity	Btu/h	6200/6000
----------	-------	-----------

Indoor side fan motor

Model		ZKFP-25-8-157L
Cooling Speed(hi/lo)		930/800
Heating Speed(hi/lo)	r/min	1040/940
Insulation class		B
Waterproofing class		IP20

Outdoor side fan motor

Model		YKT-58-4-3L
Input	W	87
Capacitor	uF	3
Speed(hi/mi/lo)	r/min	1580
Capacitor class		S3
Insulation class		B

Air flow and noise level

Indoor side air flow(Hi/Mi/Lo)	m3/h	603/0/502
Indoor side noise level (Hi/Mi/Lo)	dB(A)	51/0/50.5
Outdoor side noise level(Hi)	dB(A)	67

Input	W	480/460
Current	A	2.6/2.7
COP	W/W	3.60

Electrical

Starting current	A	33.9
Starting current optional 3500W	A	45.9
Plug type		LCDI(6-15P)
Plug type optional 3500W		LCDI(6-20P)

Compressor

Model		KSN54N11UAJB3
Type		ROTARY
Brand		GMCC
Capacity	W	1565/1610
Input	W	575/580
Rated current	A	2.75/2.45
Locked rotor Amp(LRA)	A	14
Thermal protector		USP-233-05
Thermal protector position		INTERNAL
Capacitor	uF	15
Refrigerant oil/oil charge	ml	VG68 190±10

Unit dimension




Dimension 1 (no sleeve, no rear grille, no rear net)			
Model	W(inch)	D(inch)	H(inch)
32AC07CD25 / 32AC07CD35	42	20.9	15.9
32HP07CD25 / 32HP07CD35	42	20.9	15.9
32AC09CD25 / 32AC09CD35	42	20.9	15.9
32HP09CD25 / 32HP09CD35	42	20.9	15.9
32AC09CD25 / 32AC09CD35	42	20.9	15.9
32HP09CD25 / 32HP09CD35	42	20.9	15.9
32AC09SD35 / 32HP09SD35	42	20.9	15.9
32AC12CD35 / 32AC12CD50	42	20.9	15.9
32HP12CD35 / 32HP12CD50	42	20.9	15.9
32AC12CD35 / 32AC12CD50	42	20.9	15.9
32HP12CD35 / 32HP12CD50	42	20.9	15.9
32AC12SD35 / 32HP12SD35	42	20.9	15.9
32AC15CD35 / 32AC15CD50	42	20.9	15.9
32HP15CD35 / 32HP15CD50	42	20.9	15.9

System data

Refrigerant type (R32)	Refrigerant type	R32
	kg	0.68
	oz(1kg=35.274oz)	23.99
Design pressure(145psi=1MPa)(L/H)	psi	300/580

Dimension and Weight

Dimension(W*D*H)	mm	1067x532x406
	in	42.01x20.94x15.98
Packing (W*D*H)	mm	1130x625x490
	in	44.49x24.61x19.29
Net/Gross weight	kg	46/50
	lb	101.41/110.23

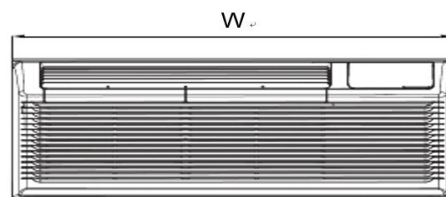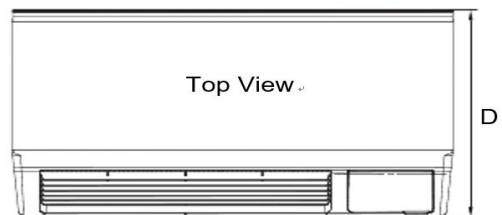

Dimension 1 (include sleeve, rear grille, and rear net)			
Model	W(inch)	D(inch)	H(inch)
32AC07CD25 / 32AC07CD35	42	23.9	16
32HP07CD25 / 32HP07CD35	42	23.9	16
32AC09CD25 / 32AC09CD35	42	23.9	16
32HP09CD25 / 32HP09CD35	42	23.9	16
32AC09CD25 / 32AC09CD35	42	23.9	16
32HP09CD25 / 32HP09CD35	42	23.9	16
32AC09SD35 / 32HP09SD35	42	23.9	16
32AC12CD35 / 32AC12CD50	42	23.9	16
32HP12CD35 / 32HP12CD50	42	23.9	16
32AC12CD35 / 32AC12CD50	42	23.9	16
32HP12CD35 / 32HP12CD50	42	23.9	16
32AC12SD35 / 32HP12SD35	42	23.9	16
32AC15CD35 / 32AC15CD50	42	23.9	16
32HP15CD35 / 32HP15CD50	42	23.9	16