

SUBMITTAL DATA SHEET

ComfortStar®

9K

Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

Set Model 32HP09CD25 / 32HP09CD35

Certified

AHRI



UL



Performance data

Power supply	V-Ph-Hz	208/230V, 1Ph, 60Hz
Capacity	Btu/h	9300/9200
EER	W/W	11.4
Input	W	820/810
Current	A	4.2/4.6

Heating(PTC)

Capacity	Btu/h	10900/8900
Input(Heater)	W	3500/2897
Current	A	15.3/13.7

Heating(PTC) optional 2500W

Capacity	Btu/h	7800/6300
Input(Heater)	W	2580/2150
Current	A	11.3/10.3

Heating(Heat pump)(Standard conditions)

Indoor side fan motor

Model		ZKFP-25-8-157L
Cooling Speed(hi/lo)		930/800
Heating Speed(hi/lo)	r/min	1110/1020
Insulation class		B
Waterproofing class		IP20

Outdoor side fan motor

Model		YKT-37-4-203L
Input	W	71
Capacitor	uF	3
Speed(hi/mi/lo)	r/min	1365
Capacitor class		S3
Insulation class		B

Air flow and noise level

Indoor side air flow(Hi/Mi/Lo)	m3/h	617/0/510
Indoor side noise level (Hi/Mi/Lo)	dB(A)	50/0/49.5

Capacity	Btu/h	8100/7900
Input	W	720/690
Current	A	3.9/4.3
COP	W/W	3.40

Electrical

Starting current	A	33.9
Starting current optional 2500W	A	45.9
Plug type		LCDI(6-20P)
Plug type optional 2500W		LCDI(6-15P)

Compressor

Model		KSN82N13VDZB1
Type		ROTARY
Brand		GMCC
Capacity	W	2970/3015 ±3%
Input	W	710/718 ±3%
Rated current	A	3.45/3.15 ±3%
Locked rotor Amp(LRA)	A	20 ±10%
Thermal protector		/
Thermal protector position		INTERNAL
Capacitor	uF	20
Refrigerant oil/oil charge	ml	VG68·270±10

Unit dimension

Dimension 1 (no sleeve, no rear grille, no rear net)			
Model	W(inch)	D(inch)	H(inch)
32AC07CD25 / 32AC07CD35	42	20.9	15.9
32HP07CD25 / 32HP07CD35	42	20.9	15.9
32AC09CD25 / 32AC09CD35	42	20.9	15.9
32HP09CD25 / 32HP09CD35	42	20.9	15.9
32AC09CD25 / 32AC09CD35	42	20.9	15.9
32HP09CD25 / 32HP09CD35	42	20.9	15.9
32AC09SD35 / 32HP09SD35	42	20.9	15.9
32AC12CD35 / 32AC12CD50	42	20.9	15.9
32HP12CD35 / 32HP12CD50	42	20.9	15.9
32AC12CD35 / 32AC12CD50	42	20.9	15.9
32HP12CD35 / 32HP12CD50	42	20.9	15.9
32AC12SD35 / 32HP12SD35	42	20.9	15.9
32AC15CD35 / 32AC15CD50	42	20.9	15.9
32HP15CD35 / 32HP15CD50	42	20.9	15.9




Outdoor side noise level(Hi)	dB(A)	64
------------------------------	-------	----

System data

Refrigerant type (R32)	Refrigerant type	R32
	kg	0.43
	oz(1kg=35.274oz)	15.17
Design pressure(145psi=1MPa)(L/H)	psi	300/580

Dimension and Weight

Dimension(W*D*H)	mm	1067x532x406
	in	42.01x20.94x15.98
Packing (W*D*H)	mm	1130x625x490
	in	44.49x24.61x19.29
Net/Gross weight	kg	45/49
	lb	99.21/108.03

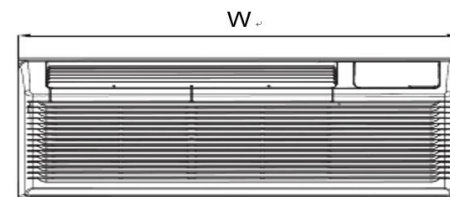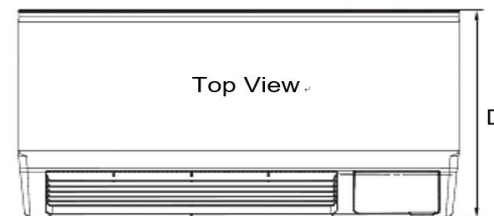

Dimension 1 (include sleeve, rear grille, and rear net)			
Model	W(inch)	D(inch)	H(inch)
32AC07CD25 / 32AC07CD35	42	23.9	16
32HP07CD25 / 32HP07CD35	42	23.9	16
32AC09CD25 / 32AC09CD35	42	23.9	16
32HP09CD25 / 32HP09CD35	42	23.9	16
32AC09CD25 / 32AC09CD35	42	23.9	16
32HP09CD25 / 32HP09CD35	42	23.9	16
32AC09SD35 / 32HP09SD35	42	23.9	16
32AC12CD35 / 32AC12CD50	42	23.9	16
32HP12CD35 / 32HP12CD50	42	23.9	16
32AC12CD35 / 32AC12CD50	42	23.9	16
32HP12CD35 / 32HP12CD50	42	23.9	16
32AC12SD35 / 32HP12SD35	42	23.9	16
32AC15CD35 / 32AC15CD50	42	23.9	16
32HP15CD35 / 32HP15CD50	42	23.9	16