

# SUBMITTAL DATA SHEET

## Heat Pump System

Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

<b>Set Code</b>	22020330000145
<b>Set Model</b>	32HP12CD35
<b>Certified</b>	AHRI  UL 



### Performance data

Power supply	V-Ph-Hz	208/230V, 1Ph, 60Hz
Capacity	Btu/h	12000/11800
EER	W/W	10.5
Input	W	1040/1020
Current	A	5.3/5.8

### Heating(PTC)

Capacity	Btu/h	10900/8900
Input(Heater)	W	3500/2897
Current	A	15.3/13.7

### Heating(PTC) optional 5000W

Capacity	Btu/h	15000/12200
Input(Heater)	W	5000/4100
Current	A	22.3/20.1

### Indoor side fan motor

Model		ZKFP-25-8-157L
Cooling Speed(hi/lo)		1110/930
Heating Speed(hi/lo)	r/min	1110/1020
Insulation class		B
Waterproofing class		IP20

### Outdoor side fan motor

Model		YKT-58-4-3L
Input	W	87
Capacitor	uF	3
Speed(hi/mi/lo)	r/min	1580
Capacitor class		S3
Insulation class		B

**Heating(Heat pump)(Standard conditions)**

Capacity	Btu/h	10800/10500
Input	W	890/850
Current	A	5.0/5.3
COP	W/W	3.2

**Electrical**

Starting current	A	45.90
Starting current optional 5000W	A	65.0
Plug type		LCDI(6-20P)
Plug type optional 5000W		LCDI(6-30P)

**Compressor**

Model		KSM100N11VEZ
Type		ROTARY
Brand		GMCC
Capacity	W	3590/3620
Input	W	850/875±3%
Rated current	A	4.18/3.85±3%
Locked rotor Amp(LRA)	A	28.5±10%
Thermal protector		UP-A2H/HPA-325H
Thermal protector position		INTERNAL
Capacitor	uF	35
Refrigerant oil/oil charge	ml	VG68 300±15

**Air flow and noise level**

Indoor side air flow(Hi/Mi/Lo)	m3/h	745/0/585
Indoor side noise level (Hi/Mi/Lo)	dB(A)	52/0/51.5
Outdoor side noise level(Hi)	dB(A)	67



**System data**

Refrigerant type (R32)	Refrigerant type	R32
	kg	0.76
	oz(1kg=35.274oz)	26.81
Design pressure(145psi=1MPa )(L/H)	psi	300/580

**Dimension and Weight**

Dimension(W*D*H)	mm	1067x532x406
	in	42.01x20.94x15.98
Packing (W*D*H)	mm	1130x625x490
	in	44.49x24.61x19.29
Net/Gross weight	kg	50/54
	lb	110.23/119.05

Unit dimension

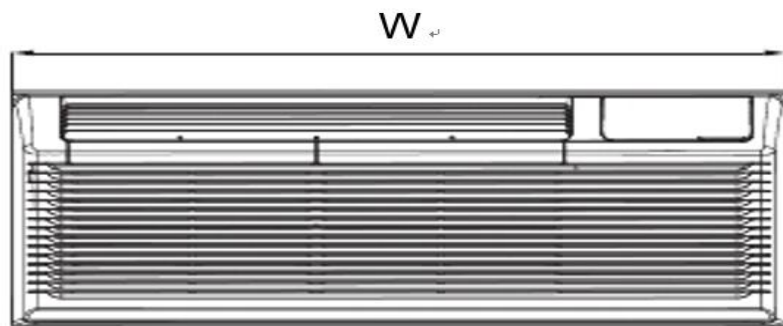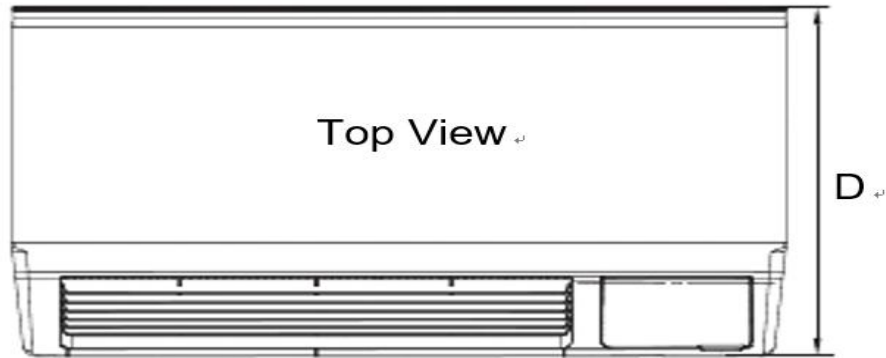

## Dimension 1 (no sleeve, no rear grille, no rear net)

Model	W(inch)	D(inch)	H(inch)
32AC07CD35	42	20.9	15.9
32HP07CD35	42	20.9	15.9
32AC09CD35(KSN66)	42	20.9	15.9
32HP09CD35(KSN71)	42	20.9	15.9
32AC09CD35(KSN71)	42	20.9	15.9
32HP09CD35(KSN82)	42	20.9	15.9
32HP09SD35	42	20.9	15.9
32AC12CD35(cooling input:1030,1010)	42	20.9	15.9
32HP12CD35(cooling input:1030,1010)	42	20.9	15.9
32AC12CD35(cooling input:1080,1060)	42	20.9	15.9
32HP12CD35(cooling input:1040,1020)	42	20.9	15.9
32HP12SD35	42	20.9	15.9
32AC15CD35	42	20.9	15.9
32HP15CD35	42	20.9	15.9

## Dimension 1 (include sleeve, rear grille, and rear net)

Model	W(inch)	D(inch)	H(inch)
32AC07CD35	42	23.9	16
32HP07CD35	42	23.9	16
32AC09CD35(KSN66)	42	23.9	16
32HP09CD35(KSN71)	42	23.9	16
32AC09CD35(KSN71)	42	23.9	16
32HP09CD35(KSN82)	42	23.9	16
32HP09SD35	42	23.9	16
32AC12CD35(cooling input:1030,1010)	42	23.9	16
32HP12CD35(cooling input:1030,1010)	42	23.9	16
32AC12CD35(cooling input:1080,1060)	42	23.9	16
32HP12CD35(cooling input:1040,1020)	42	23.9	16
32HP12SD35	42	23.9	16
32AC15CD35	42	23.9	16
32HP15CD35	42	23.9	16