

ComfortStar®

Air Conditioning & Heating Products

CG SERIES GAS FURNACE 80%



Comfort it's in our name

© 12201 N. W. 107th Avenue | Medley, FL 33178

☎ **Toll Free:** 1-866-524-9898 | **Phone:** 1-305-500-9898 | **Fax:** 1-305-500-9896



www.comfortstarusa.com

Email us: info@comfortstarusa.com




CG SERIES GAS FURNACE 80%

STANDARD FEATURES:

- Durable aluminized Steel tubular heat exchanger.
- Hot-surface ignition for dependable operation.
- Quiet multi-speed direct-drive Blower.
- Natural gas and propane (LP) convertible.
- Designed for multi-position installation: Up flow, down flow, horizontal.
- Industry-standard cabinet sizes for easy replacement, installation and add-on cooling.
- Convenient left or right connection for gas and electric service.
- Removable bottom for side or bottom return application.



DIMENSIONS:

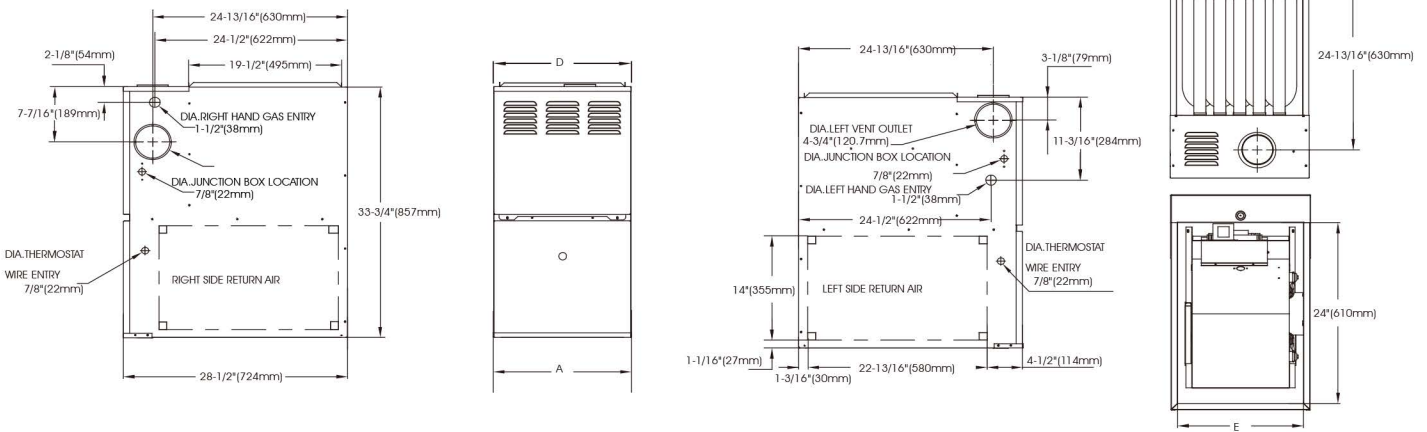

FURNACE SIZE	A CABINET WIDTH IN	D SUPPLY AIR WIDTH IN	E RETURN AIR WIDTH IN	SHIP WT (lbs)
40A	14.5	13	15-57/32	119
60A	14.5	13	15-57/32	119
60B	17.5	16	15-27/32	126
80B	17.5	16	15-27/32	139
80C	21	19.5	19-13/32	146
100C	21	19.5	19-13/32	159
120D	24.5	23	22-27/32	170



CG SERIES GAS FURNACE 80%

SPECIFICATIONS

MODEL		CG40A	CG60A	CG60B	CG80B
		Natural/Propane Gas	Natural/Propane Gas	Natural/Propane Gas	Natural/Propane Gas
GAS HEATING PERFORMANCE	Input (BTU/h)	40,000	60,000	60,000	80,000
	Natural Gas	32,000	48,000	48,000	64,000
	LP Gas	32,000	48,000	48,000	64,000
	AFUE	80	80	80	80
	Available AC @ 0.5" ESP	1/1.5/2/2.5	1.5/2/2.5/3	1.5/2/2.5/3	2.5/3/3.5/4
	Temperature Rise Range (° F)	20-50	25-55	25-55	30-60
ELECTRICAL DATA	Voltage/phase(60Hz)	115	115	115	115
	Min./ Max. Voltage	104/127	104/127	104/127	104/127
	Min. Circuit Ampacity	6	6	6	6
	Max. Overcurrent Protection	15	15	15	15
FAN MOTOR	MotorType	ECM	ECM	ECM	ECM
	Horsepower	1/2	1/2	1/2	1/2
	Rated RPM	1050	1050	1050	1050
	Full Load Amps (FLA)	8	8	8	8
	Capacitor (uF)	-	-	-	-
CIRCULATOR BLOWER	Material	Metal	Metal	Metal	Metal
	Type	Centrifugal	Centrifugal	Centrifugal	Centrifugal
	Size (D x H) (in.)	11-3/16x 6-9/64	11-3/16x 6-9/64	11-3/16x 6-9/64	11-3/16x 6-9/64
	Vent Diameter ¹	3/4"	3/4"	3/4"	3/4"
	No. of Burners	3	3	3	3
	Speed Mode Number	5	5	5	5

SPECIFICATIONS

MODEL		CG80C	CG100C	CG120D
		Natural/Propane Gas	Natural/Propane Gas	Natural/Propane Gas
GAS HEATING PERFORMANCE	Input (BTU/h)	80,000	100,000	120,000
	Natural Gas	64,000	80,000	96,000
	LP Gas	64,000	80,000	96,000
	AFUE	80	80	80
	Available AC @ 0.5" ESP	2.5/3/3.5/4	3.5/4/4.5/5	3.5/4/4.5/5
	Temperature Rise Range (° F)	30-60	30-60	35-65
ELECTRICAL DATA	Voltage/phase(60Hz)	115	115	115
	Min./ Max. Voltage	104/127	104/127	104/127
	Min. Circuit Ampacity	6	12.3	13
	Max. Overcurrent Protection	15	20	20
FAN MOTOR	MotorType	ECM	ECM	ECM
	Horsepower	1/2	1	1
	Rated RPM	1050	1050	1050
	Full Load Amps (FLA)	8	14	14
	Capacitor (uF)	-	-	-
CIRCULATOR BLOWER	Material	Metal	Metal	Metal
	Type	Centrifugal	Centrifugal	Centrifugal
	Size (D x H) (in.)	11-3/16x 11-3/16	11-3/16x 11-3/16	12-6/8x 11-1/4
	Vent Diameter ¹	3/4"	3/4"	3/4"
	No. of Burners	5	6	7
	Speed Mode Number	5	5	5

ComfortStar®

Air Conditioning & Heating Products

CG SERIES GAS FURNACE 80%



ComfortStar®
Air Conditioning & Heating Products

Comfort... it's in our name



GASCG-2023

12201 N. W. 107TH AVENUE, MEDLEY, FL 33178 TOLL FREE: 1-866-524-9898 | PHONE: 305-500-9898 | FAX: 305-500-9896

All rights reserved. Printed in the United States of America. This publication is protected by Copyright and permission must be obtained by eAir, LLC prior to any reproduction or transmission in any form or by any means, electronic, mechanical, photocopying, recording or likewise. Warranty registration is not required in California.

e-mail: info@comfortstarusa.com | www.comfortstarusa.com