

Submittal

Split System Cooling

BAR4-60-15

Location:
Engineer:
Submitted to:
Submitted by:
Reference:

Approval:
Date:
Construction:
Unit # :
Drawing # :




Note:"Graphics in this document are for representation only. Actual model may differ in appearance."





Unit dimension

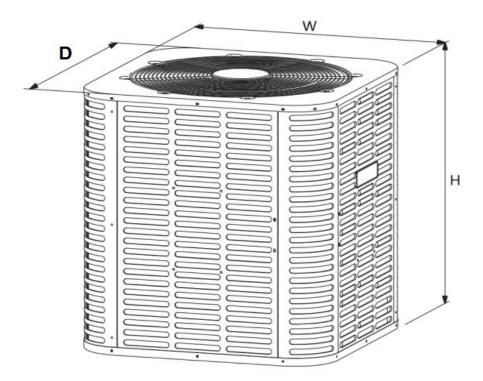

UNIT DIMENSION	18K	24K	30K	36K	42K	48K	60K
Height (in.)	25	25	25	25	32-7/8	32-7/8	32-7/8
Width (in.)	21-4/5	21-4/5	29-1/7	29-1/7	29-1/7	29-1/7	29-1/7
Depth (in.)	21-4/5	21-4/5	29-1/7	29-1/7	29-1/7	29-1/7	29-1/7

ComfortStar[®]

Specification

Model			BAR4-60-15	
Outdoor power supply		V/Ph/Hz	230V/1N/60H	
Max. input consumption		W	6250	
Max. current		A	28.	
	Brand		LG	
	Model		ABG051KAC	
Compressor	Туре		scroll	
	Capacity	Btu/h	14974	
	Input	W	4722	
	TYPE		ECM	
	Model		DRN-310-200-10	
	Output	W	200	
Outdoor fan motor	Horspower	HP	3/11	
	FLA	А	0.65	
	rate current	А	1.6	
	Speed	rpm	1050	
Outdoor air flow		CFM	382	
Outdoor noise level		dB(A)	63	
Throttling type			Piston	
	Unit (WxHxD)	in	29-1/7×32-7/8×29-1/7	
Outdoor dimension		mm	740×835×740	
	Packing (WxHxD)	in	29-9/10×34-2/5×29-9/10	
		mm	760×875×760	
Refrigerant	Туре		R410A	
Reingerant	Charging	oz	185.18	
Refrigerant pipe	Liquid side	in	ФЗ/8	
	Gas side	in	Φ7/8	
Design pressure		MPa	4.0/1.2	
Max pressure		MPa	4.2	
Operation temp range	Cooling	°F	58-115	
Operation temp range	Heating	۴	19-75	

Outdoor Unit	Indoor Unit	Cooling Capacity EER2		SEER2
BAR4-60-15	LUC4-60-15	56000	11.2	13.8



12201 N W 107th Avenue Miami, FL 33178 1.866.524.9898 Toll Free 305.500.9898 Office 305.500.9896 Fax http://www.comfortstarusa.com



The AHRI mark indicates Comfortstar participating in the AHRI Certification program. Visit ahridirectory.org for verification of individual certified products. Comfortstar reserves the right to change design and specs without notice. Comfortstar has a policy of update the data continuously.We are committed to using environmentally conscious print practices.

US

BAR4-60-15 16th Jan 2024 Supersedes BAR4-60-15 (Jan 2024)

© 2024 ComfortStar