

**Ceiling&Floor Heat Pump System**

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



**INDOOR SPEINDOOR SPECIFICATIONCIFICATION**

<b>Indoor Air Flow (Turbo/H/M/L/Si) (CFM)</b>	735.8 / 706.3 / 606.3 / 453.2 / 376.7	
<b>Indoor Noise Level (Turbo/H/M/L/Si) (dBA)</b>	51.0/49.0/45.0/34.0/29.0	
<b>Dimension (W×D×H)</b>	inch	42.05 x 26.57 x 9.25
	mm	1068.0×675.0×235.0
<b>Package (W×D×H)</b>	inch	45.08 x 29.72 x 12.52
	mm	1145×755×318
<b>Net/Gross Weight</b>	lbs	61.29/73.19
	kg	27.8/33.2

**OUTDOOR SPECIFICATION**

<b>Compressor Type</b>	ROTARY	
<b>Compressor Model</b>	KTM240D46UKT2	
<b>Refrigerant</b>	R454B	
<b>Refrigerant Oil Charge(mL)</b>	620	
<b>Refrigerant Oil</b>	VG74	
<b>Outdoor Air Flow (Max) (CFM)</b>	2236.7	
<b>Outdoor Noise Level (dBA)</b>	59.0	
<b>Dimension (W×D×H)</b>	inch	37.24 x 16.14 x 31.89
	mm	946.0×410.0×810.0
<b>Package (W×D×H)</b>	inch	42.91 x 19.68 x 34.84
	mm	1090×500×885
<b>Net/Gross Weight</b>	lbs	122.13/132.28
	kg	55.4/60.0

**EFFICIENCY**

Cooling		Heating	
<b>SEER2</b>	21.1	<b>HSPF2-4</b>	11.1
<b>EER2</b>	12.2	<b>COP</b>	2.99

**PERFORMANCE of Cooling**

Cooling (Btu/hr)	
<b>Rated Capacity</b>	24000
<b>Min/Max Capacity</b>	11100~29000
<b>Moisture Removal(L/h)</b>	3.07
<b>Standard Operating Range(°F/°C)</b>	-13~122(-25~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

**PERFORMANCE of Heating**

Heating (Btu/hr)	
<b>1. @ 47°F Rated</b>	24500
<b>1. @ 47°F Min/Max Capacity</b>	11800~32600
<b>2. @ 17°F Rated</b>	20000
<b>3. @ 5°F Rated: Capacity / COP</b>	18600/2.27
<b>3. @ 5°F Max: Capacity</b>	18600
<b>Standard Operating Range(°F/°C)</b>	-13~75(-25~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


**ELECTRICAL**

<b>Power Supply</b>	208/230V,60Hz,1Ph
<b>System MCA</b>	24.00
<b>Connection Wiring</b>	14#x4
<b>System MOCP</b>	25
<b>Compressor RLA</b>	15.4
<b>Outdoor Fan Motor RLA</b>	1.0
<b>Outdoor Fan Motor W</b>	120
<b>Indoor Fan Motor RLA</b>	1.0
<b>Indoor Fan Motor W</b>	96
<b>System Power Input @ Cooling (W)</b>	1967(820 ~ 2610)
<b>System Power Input @ Heating (W)</b>	2385(675 ~ 2990)
<b>MCA: Min. circuit amps (A)</b>	<b>MOCP: Max. over current protection (A)</b>
<b>RLA: Rated load amps (A)</b>	<b>W: Fan motor rated output (W)</b>

**PIPING**


<b>Throttle type(Indoor)</b>	N/A
<b>Throttle type(Outdoor)</b>	EXV+Throttle valve
<b>Liquid Size</b>	9.52mm(3/8in)
<b>Gas Size</b>	15.9mm(5/8in)
<b>Max. Piping Length(ft/m)</b>	164.00(50)
<b>Max. Height Difference(ft/m)</b>	82.00(25)
<b>Max. Pre-charged Length(ft/m)</b>	24.6(7.5)
<b>Refrigerant Pre-charged Amount(oz/kg)</b>	70.55(2.00)
<b>Additional Charge of Refrigerant((oz/ft)/(g/m))</b>	0.32(30)
<b>Connection Method</b>	Flared

## Indoor Unit Dimension

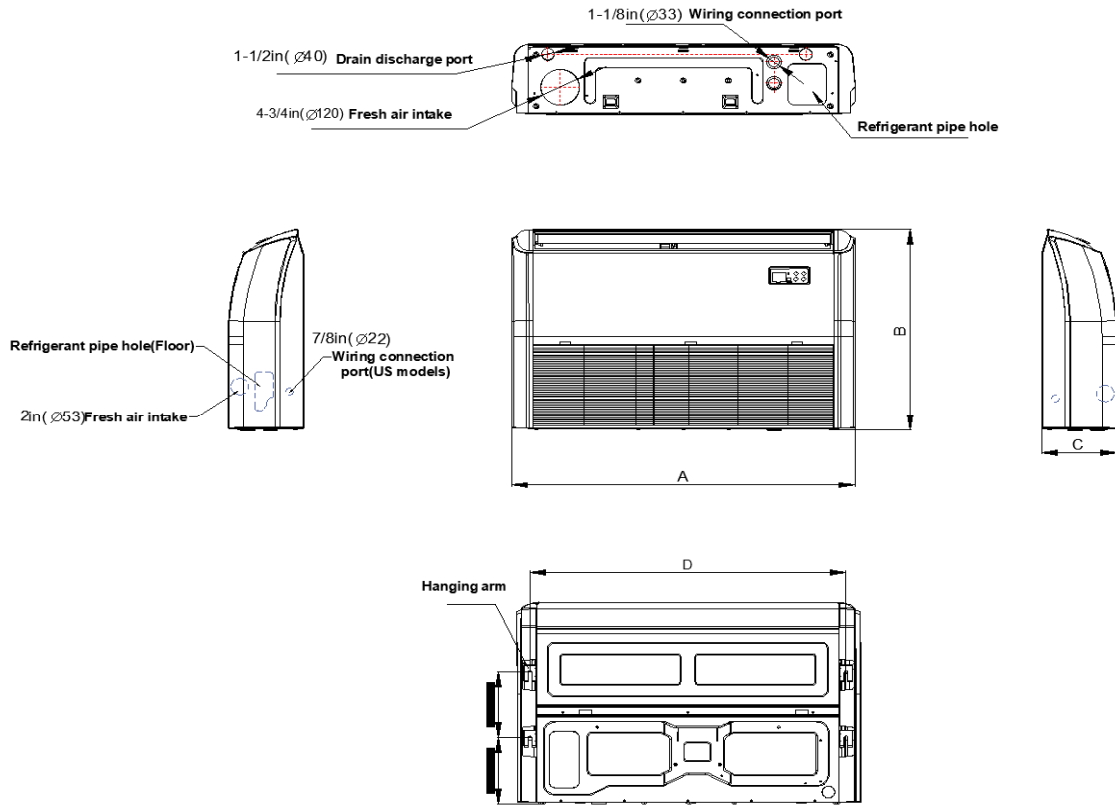


Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)


## Installation Instruction

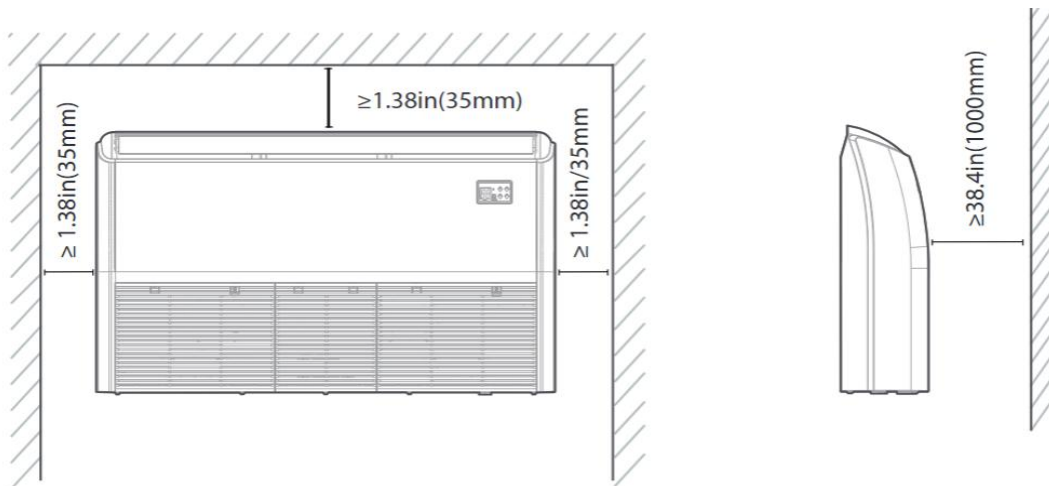

### Outdoor Unit Dimension

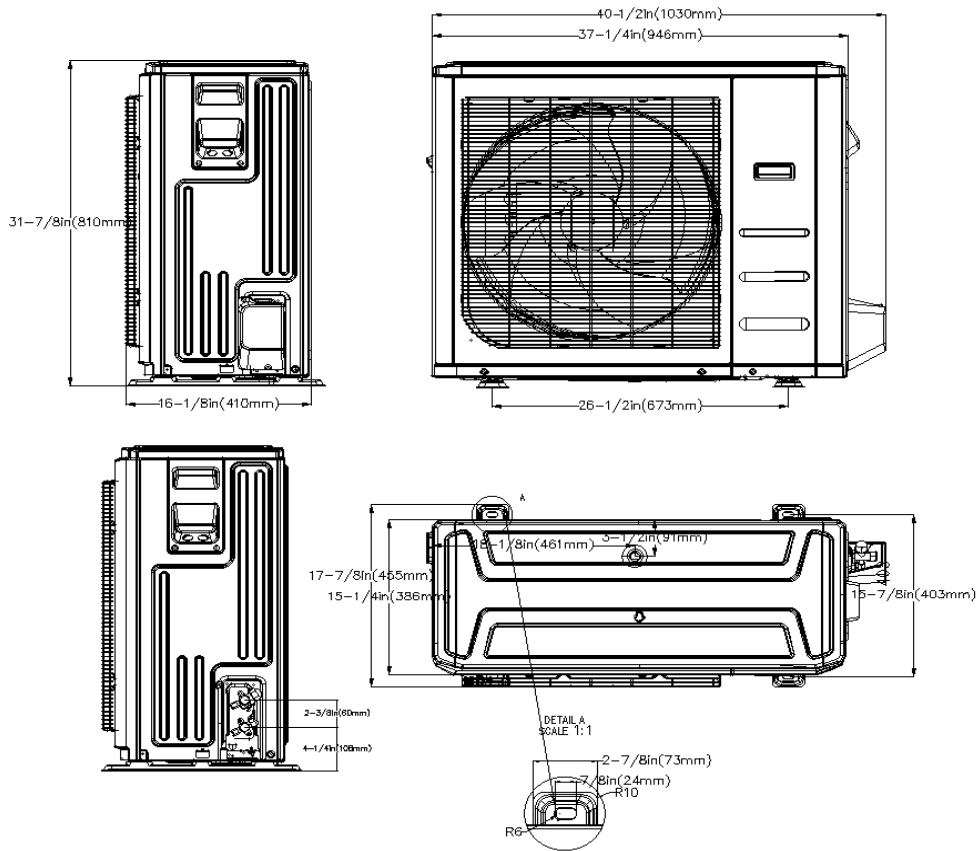

### Installation Instruction

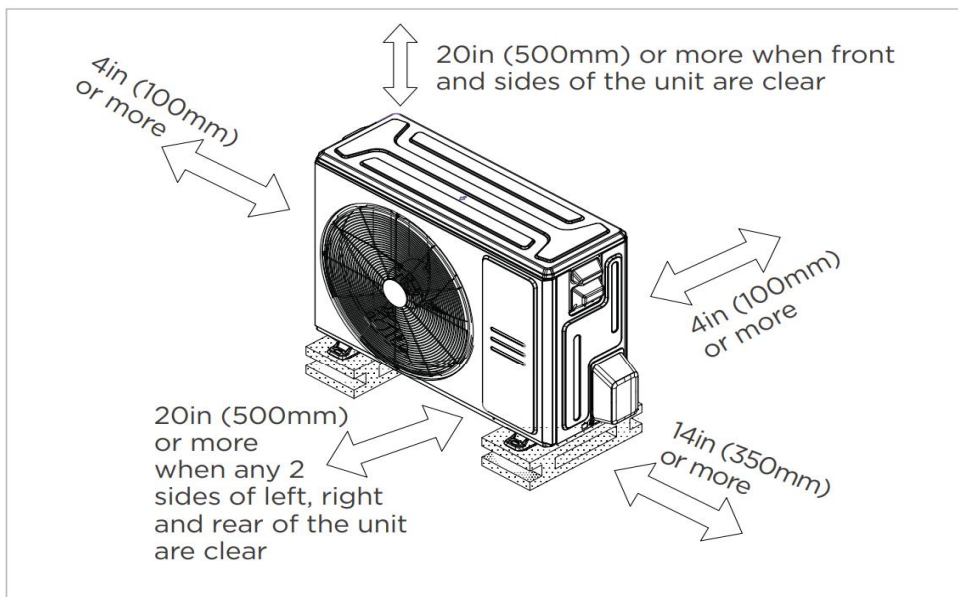

Meets all spatial requirements shown in Installation Clearance Requirements above.

## FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- “88” display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
  - Two way communication wired controller with built-in WiFi:AWC-8P-LC-WIFI
  - Infrared wired controller: AWC-4
  - Wireless remote controller
  - Third-Party 24V Thermostat

\*24V interface is required.