

Submittal

TAG: _____

PRODUCT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
SUBMITTED BY _____ DATA _____


UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Cooling Input						
Cooling Output						
CFM/ESP						
COP/HSPF						
Electrical						
Minimum Ampacity						
Max Overcurrent Protection						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES

NOTES

Condensing Unit
BAR7 Series Air Conditioner
Up to 15.2 SEER2
Cooling capacity: 42 kBTU/h

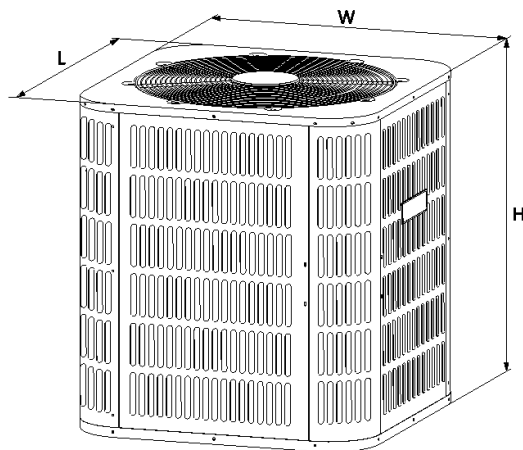

Model Size	Unit Width "W" in. [mm]	Unit Height "H" in. [mm]	Unit Length "L" in. [mm]	Packing (W*H*D) in. [mm]	Unit Weight (lbs.[kg])
18	23-5/8 [600]	24-15/16 [633]	23-5/8 [600]	24-7/10 × 26-1/4 × 24-7/10 [628 × 667 × 628]	117 [53]
24	28 [710]	24-15/16 [633]	28 [710]	29 × 26-1/4 × 29 [738 × 667 × 738]	132 [60]
30	28 [710]	33-3/16 [843]	28 [710]	29 × 34-1/2 × 29 [738 × 877 × 738]	161 [73]
36	29-1/8 [740]	24-15/16 [633]	29-1/8 [740]	30-1/5 × 26-1/4 × 30-1/5 [768 × 667 × 768]	154 [70]
42	29-1/8 [740]	33-3/16 [843]	29-1/8 [740]	30-1/5 × 34-1/2 × 30-1/5 [768 × 877 × 768]	174 [79]
48	28 [710]	33-3/16 [843]	28 [710]	29 × 34-1/2 × 29 [738 × 877 × 738]	187 [85]
60	29-1/8 [740]	33-3/16 [843]	29-1/8 [740]	30-1/5 × 34-1/2 × 30-1/5 [768 × 877 × 768]	212 [96]
61	29-1/8 [740]	33-3/16 [843]	29-1/8 [740]	30-1/5 × 34-1/2 × 30-1/5 [768 × 877 × 768]	212 [96]

Specifications

	BAR7-42-15
NOMINAL CAPACITY Cooling (BTU/h)	41,000
ELECTRICAL DATA Voltage / Phase (60 Hz) Min. / Max. Voltage (V) Min. Circuit Amps (MCA) (A) Max. Overcurrent Protection (MOP) (A)	208/230V-1Ph 187/253 24.5 42.6
COMPRESSOR Type Stage Rated Load Amps (RLA) (A) Locked Rotor Amps (LRA) (A) Crankcase Heater	Scroll Single 18.2 96 No
CONDENSER COIL Type Tube Size (O.D) (in.)	Tube & Fin 3/16
FAN MOTOR Motor Type Capacitor (uF) Horsepower (HP) Full Load Amps (FLA) (A)	ECM / 1/3 1.7
REFRIGERATION SYSTEM Liquid Valve Size (O.D.) (in.) Suction Valve Size (O.D.) (in.) Liquid Line Size ("O.D.) (in.) Suction Line Size ("O.D.) (in.) Refrigerant Charge (lbs. - oz.)	3/8 7/8 3/8 7/8 5 lbs. 12 OZ.
SOUND POWER (dB(A))	78
OPERATION RANGE Cooling (°C) Cooling (°F)	12.7~48.9 55~120

Standard Features:

- Eco-friendly R454B refrigerant with low GWP value.
- Energy-efficient compressor.
- Equipped with thermal overload protection.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Service valves with sweat connections and easy-access gauge ports.
- Factory-installed high-pressure switch.
- AHRI certified and ETL listed.
- Filter drier included as accessory.

Cabinet Features:

- Compact design allows for ease of installation, clearance, durability, and maneuverability.
 - Powder-painted galvanized steel cabinet chassis.
 - Protective steel louvered coil guard.
 - Steel wire axial fan guard
 - ECM fan motor and unique blade style allowing for smooth discharge air and quieter operation.
-

ComfortStar®

Add.: 12201 N W 107th Avenue Miami, FL 33178

1.866.524.9898 Toll Free

305.500.9898 Office

305.500.9896 Fax document.

<http://www.comfortstarusa.com>