

SUBMITTAL DATA SHEET

ComfortStar®

CH32-12CA

Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____
--	--

Set Model
 Indoor unit model CH32-12CA(I) (21K)
 Outdoor unit model CC32-12CA(O) (21L)

Certified


AHRI


AHRI CERTIFIED


ETL


ETL Intertek


SYSTEM PERFORMANCE DATA

Power supply		115V~/60Hz/1P
Rated cooling capacity	Btu/h	11500
Rated current	Cooling(A)	10.38
Rated input	Cooling(W)	1180
EER2 for cooling	Btu/W.h	9.4
SEER2 for cooling	Btu/W.h	17
Rated Heating capacity	Btu/h	11500
Rated current	Heating(A)	8.78
Rated input	Heating(W)	1005
HSPF2 Rating(Region IV)	Btu/W.h	9.5
HSPF2 Rating(Region V)	Btu/W.h	8.1
COP2 (47F/8.3C)	W/W	3.3
Max. Heating capacity	W/W	8100
COP2 (5F/-15C)v	W/W	1.9
Max. Current (T1)	A	2.0~14.0
Current Range	A	2.0~13.0

INDOOR UNIT DATA

Indoor air circulation-	m3/h	470/450/410/380/350
Turbo/Hi/Mid/Lo/Mute	CFM	277/265/241/224/206
Indoor noise level at cooling	dB(A)	42.9/40/36.1/33/29
Dimensions (WxDxH)	mm	777×250×201
	Inches	30.59×9.84×7.91
Net weight	kg	7.5
	Lbs.	16.5
Packing dimensions	mm	840×315×260
	Inches	33.07×12.40×10.23
Gross weight	kg	9.5
	Lbs.	20.9


REFRIGERANT PIPE DATA

Refrigerant	g	R32/500
	oz	R32/17.60
Moisture removal	Liters/h	1.3
	Pint/h	2.75
Connecting Pipe	Gas(inches)	3/8"
	Liquid(inches)	1/4"
Connecting Wiring	Size x Core number	4×16AWG
Suitable area	m2	51
	sq.ft	550

OUTDOOR UNIT DATA

Outdoor noise level	dB(A)	53
Dimensions (WxDxH)	mm	787×290×498
	Inches	30.98×11.41×19.60
Net weight	kg	21.0
	Lbs.	46.3
Packing dimensions with pipe	mm	838×338×540
	Inches	32.99×13.30×21.25
Gross weight with pipe	kg	24.0
	Lbs.	52.9


Indoor unit dimension

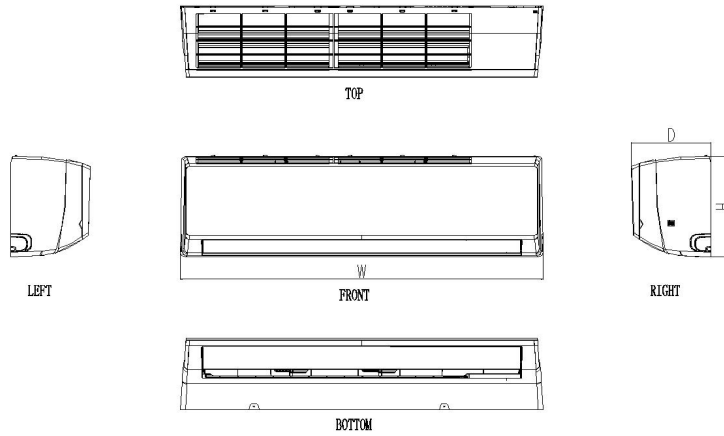

(The figure is for reference only)

Dimensions(inch)	W	H	D
CH32-12CA(I)	30.59	9.84	7.91
CH32-12CD(I)	30.59	9.84	7.91
CH32-18CD(I)	35.82	11.57	8.11
CH32-24CD(I)	39.76	12.4	8.66
CH32-36CD(I)	46.93	14.17	10.23

Outdoor unit dimension

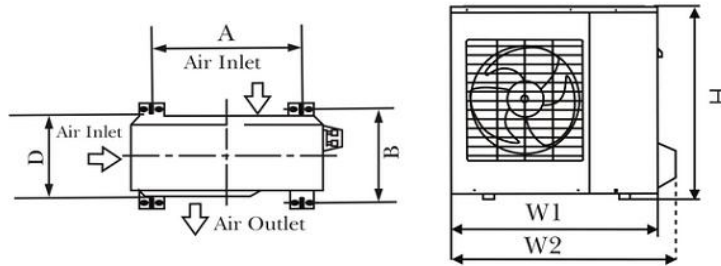

(The figure is for reference only)

Dimensions (inch)	W	H	D
CH32-12CA(O)	30.98	19.60	11.41
CH32-12CD(O)	30.98	19.60	11.41
CH32-18CD(O)	31.88	21.61	12.00
CH32-24CD(O)	33.97	23.70	13.74
CH32-36CD(O)	38.50	31.61	16.57