

Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:


INDOOR SPECIFICATION

ESP(in.W.G)	0-0.8
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	53/51/48/37.5/37.5
Dimension (WxDxH)	inch 20.28 x 15.71 x 36.54
	mm 515x399x928
Package (WxDxH)	inch 22.83 x 19.49 x 42.91
	mm 580x495x1090
Net/Gross Weight	lbs 91.49/111.33
	kg 41.5/50.5

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	KTM240D46UKT2
Refrigerant	R454B
Refrigerant Oil Charge(mL)	620
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1765.8
Outdoor Noise Level (dBA)	59
Dimension (WxDxH)	inch 35.04 x 13.46 x 26.50
	mm 890x342x673
Package (WxDxH)	inch 39.17 x 15.67 x 29.13
	mm 995x398x740
Net/Gross Weight	lbs 101.41/109.13
	kg 46/49.5

EFFICIENCY

Cooling		Heating	
SEER2	17.5	HSPF2-4	10.5
EER2	11.7	COP	3.8

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	22000
Min/Max Capacity	10100~27600
Moisture Removal(L/h)	2.5
Standard Operating Range(°F/°C)	-22~122(-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	25000
2. @ 47°F Min/Max Capacity	7000~32200
3. @ 17°F Rated	20800
4. @ 5°F Rated: Capacity / COP	19600/1.96
5. @ 5°F Max: Capacity	19400
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Indoor Power Supply	115V/208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	4
Indoor MOP	15
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	19
Outdoor MOP	20
Communication Wiring	AWG 20-2
Compressor RLA	14
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	/
Indoor Fan Motor RLA	3
Indoor Fan Motor W	250
System Power Input @ Cooling (W)	1880(830 ~ 2850)
System Power Input @ Heating (W)	1980(455 ~ 2590)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	164(50)
Max. Height Difference(ft/m)	82(25)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	74.08(2.1)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.7(65)
Connection Method	Flared

Indoor Unit Dimension

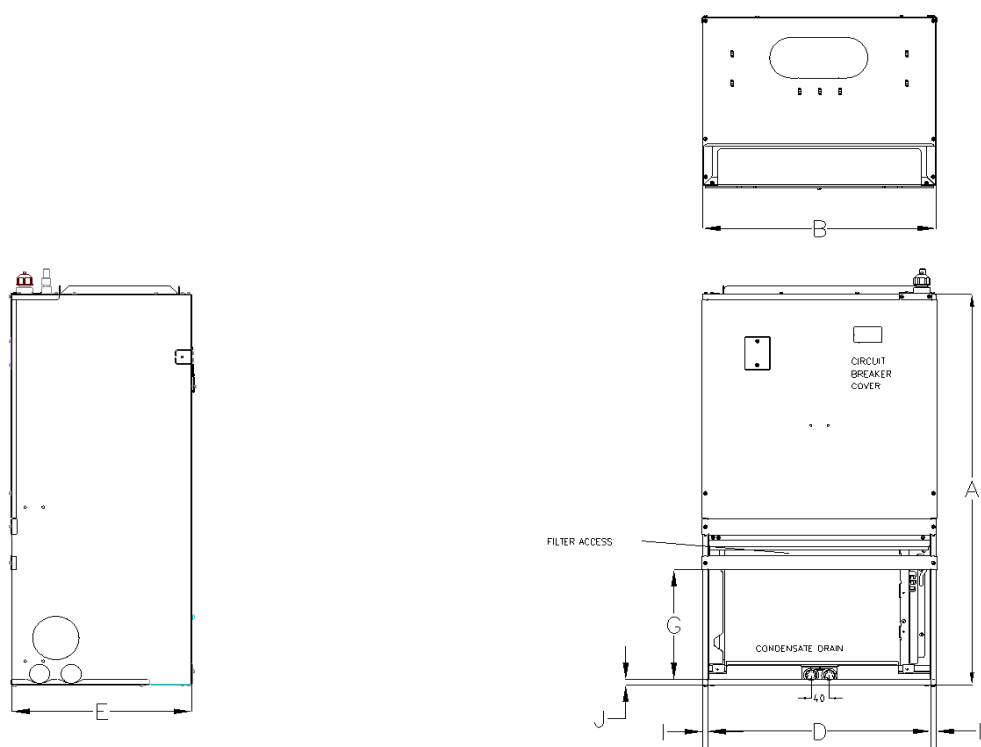


Dimensions		Model(Btu/h)	18K/24K		30K/36K	
			inch	mm	inch	mm
A	Model Height		36.5	928	49	1017
B	Model Width		20.3	515	21	559
C	Supply Air Opening Width		17.4	442	18.8	478.6
D	Return Air Opening Width		19.4	493.8	21.2	537.8
E	Model Depth		15.7	399	21	483
F	Supply Air Opening Depth		10.4	265.2	9.3	235.4
G	Return Air Opening Depth		10.3	261	13.1	332.5
H	Supply Air Opening Clearance		1.1	29.1	1.6	41
I	Return Air Opening Side Clearance		0.42	10.6	0.42	10.6
J	Return Air Opening Front Clearance		0.47	12	0.63	16

Outdoor Unit Dimension

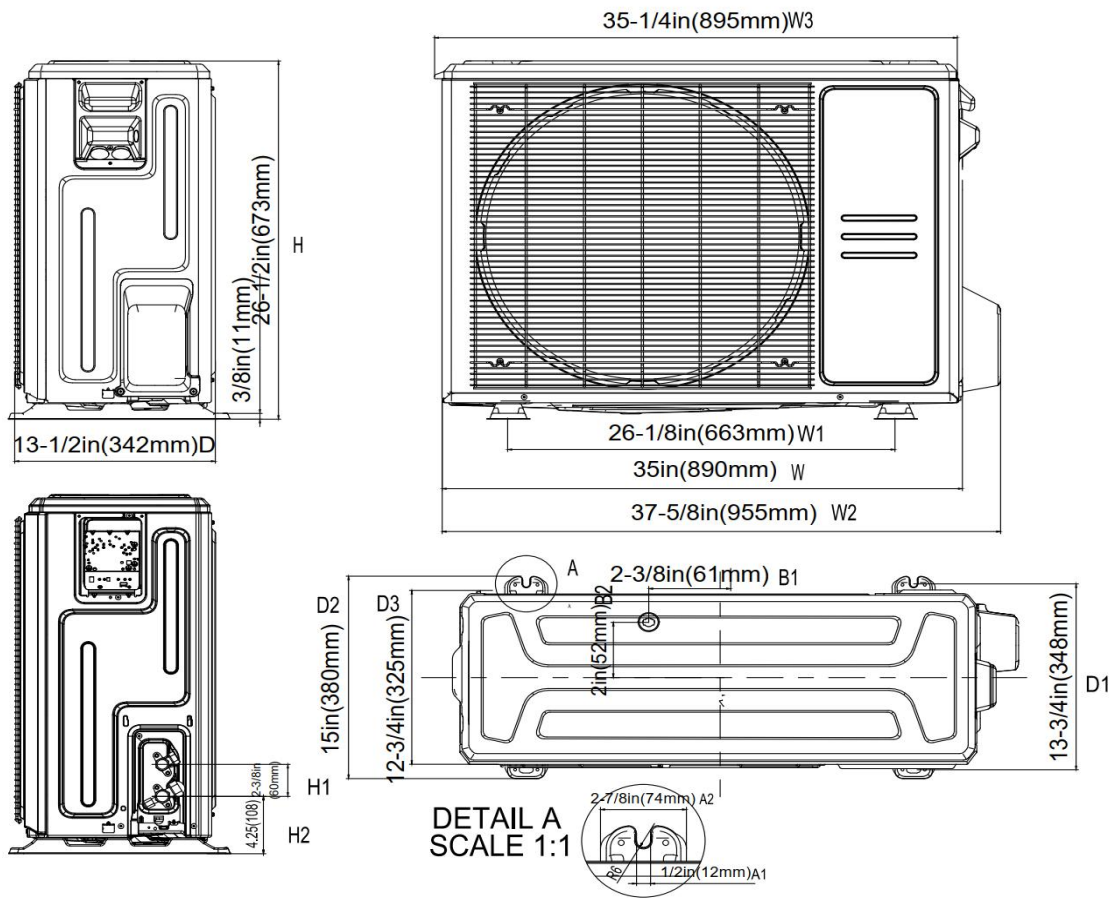


Installation Instruction For Outdoor Unit

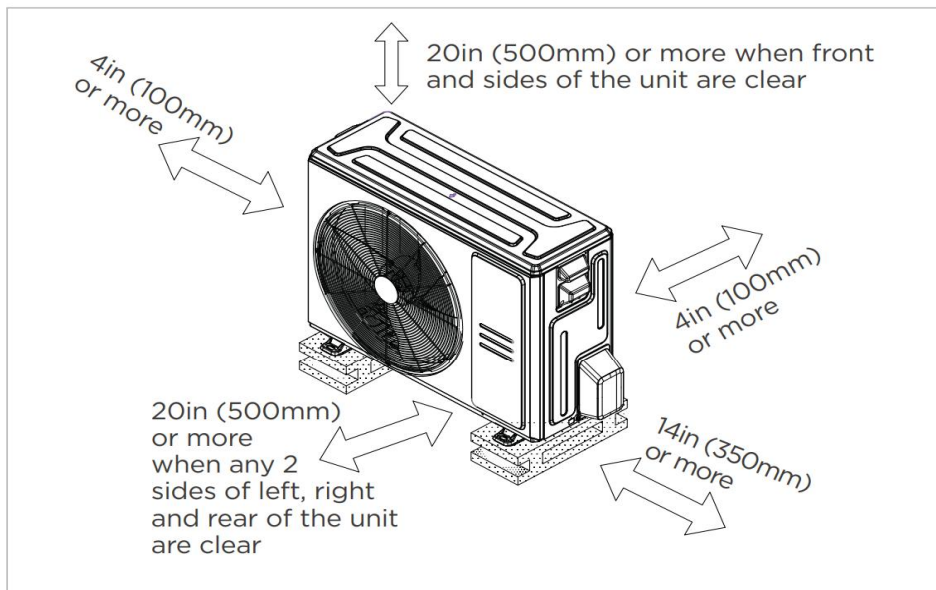

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

Fan Performance For Indoor Unit

24K

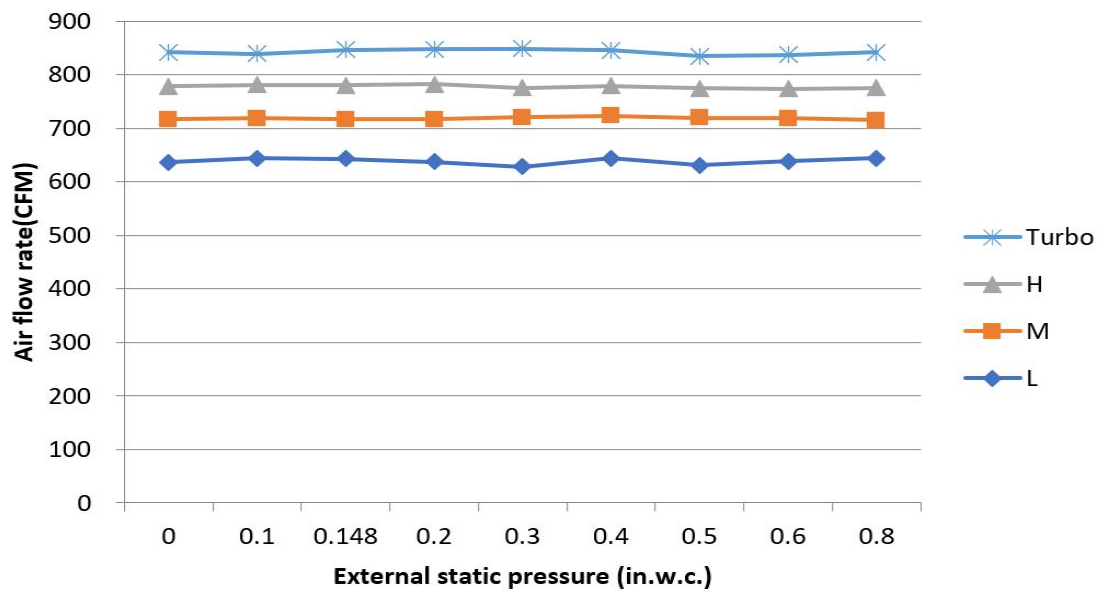

Features

- Multi-position of return air: front(factory standard) or bottom
- Aluminum Coil
- Constantly Air Flow system up to 0.80 In.W.G
- Optional Auxiliary heat kit up to 10kW
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller:AWC-4
 - Two way communication wired controller with built-in WiFi:AWC-8P-LC-WIFI
 - Wireless remote controller
 - Third-Party 24V Thermostat
- High efficiency up to 19.3 SEER2, 12.1 EER2, 10.8 HSPF2
- Chassis heater and crankcase heater equipped as standard