

ComfortStar®

Air Conditioning & Heating Products



CG SERIES GAS FURNACE 96%



R454B



Comfort, it's in our name.

📍 12860 N.W. South River Dr. | Medley, FL 33178

📞 **Toll Free:** 1-866-524-9898 | **Phone:** 1-305-500-9898 | **Fax:** 1-305-500-9896 **Email us:** info@comfortstarusa.com ✉

www.comfortstarusa.com 🌐

CG SERIES GAS FURNACE

96%

R454B



FEATURES:


- Durable aluminized steel tubular heat exchanger.
- Stainless-steel secondary heat exchanger.
- Two-stage gas valve.
- Hot surface igniter.
- Quiet multi-speed ECM circulator blower motor.
- Control board with self-diagnostics and Low-voltage terminal block.
- Natural gas and propane (LP) convertible.
- Designed for multi-position installation: Upflow, horizontal.
- Industry-standard cabinet sizes for easy replacement, installation and add-on cooling.
- Convenient left or right connection for gas and electric service.
- Removable bottom for side or bottom return applications.





CG SERIES GAS FURNACE 96%

R454B

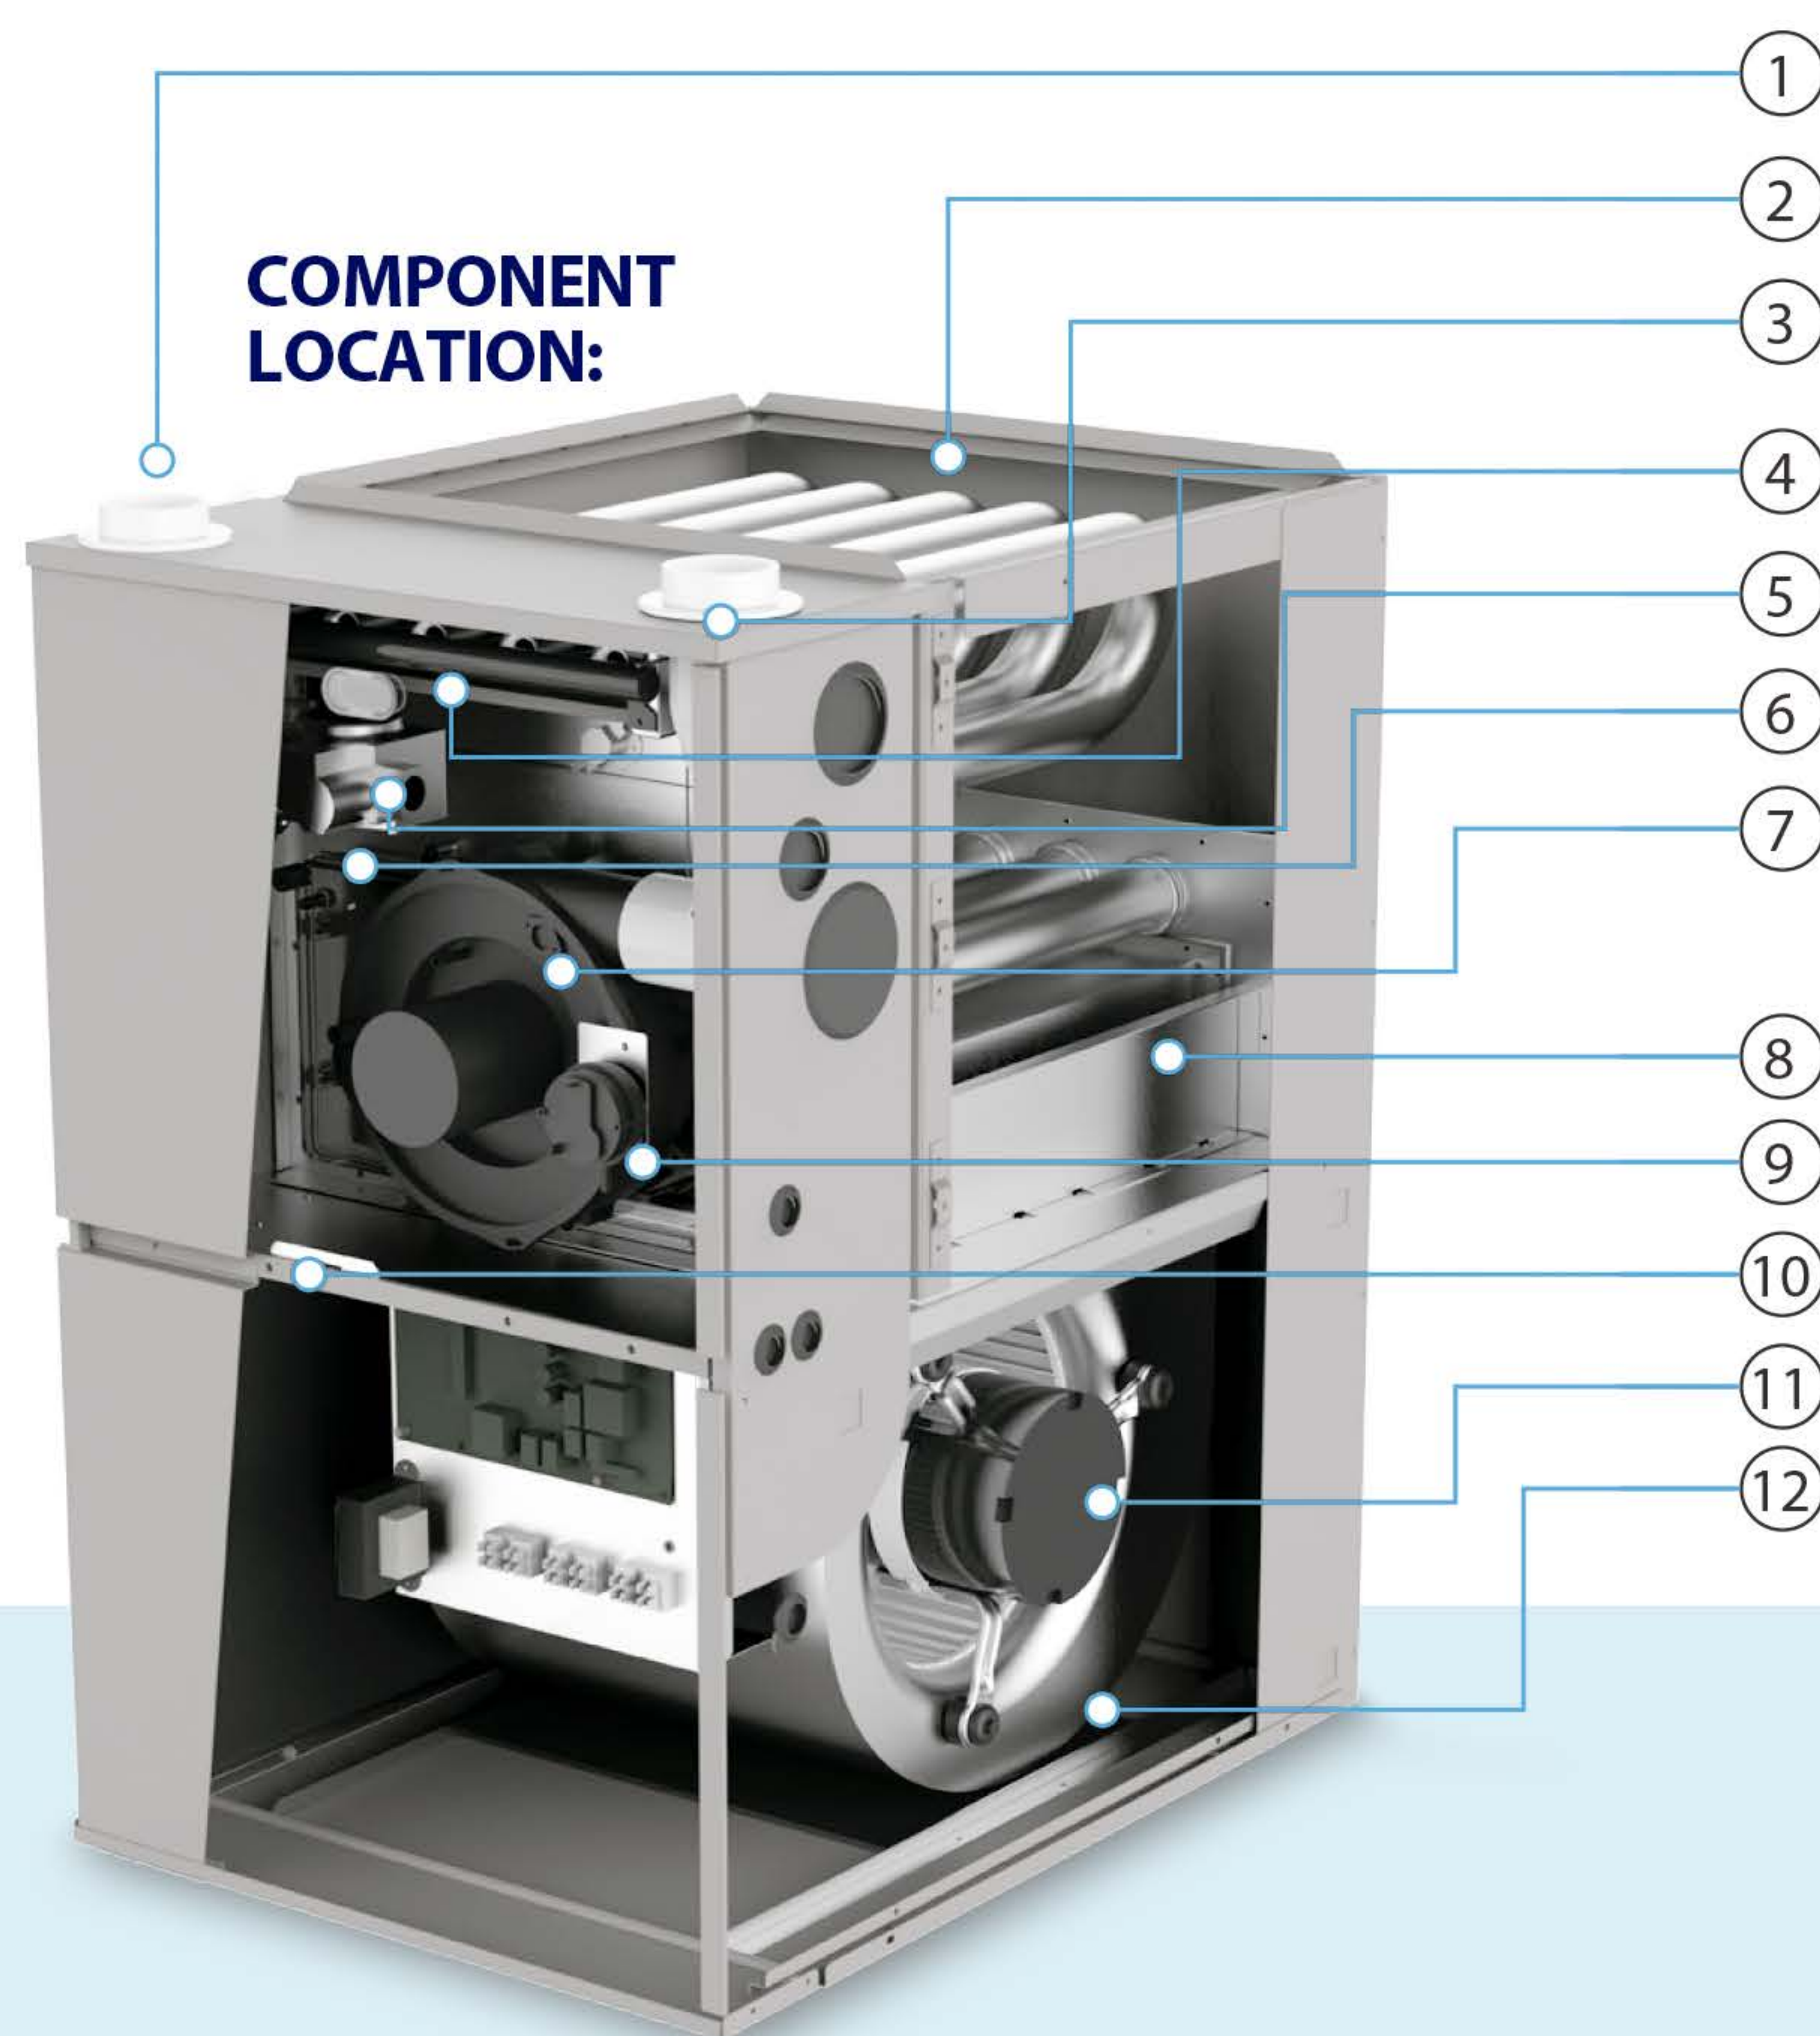

1. Air inlet pipe joint

2. First heat exchanger

3. Air outlet pipe joint

4. Burner

5. Gas valve

6. Condensate pan

7. Induced blower and motor

8. Second heat exchanger

9. Pressure switch

10. Blower door interlock switch

11. ECM motor of circulator blower

12. Circulator blower



Call Toll Free: 1-866-524-9898 | Phone: 1-305-500-9898 | Fax: 1-305-500-9896





96% AFUE GAS FURNACE TECHNICAL SPECIFICATIONS



Model		96U060B3C	96U080B3C	96U080C4C	96U100CSC	96U100D5C	96U120D5C
GAS HEATING PERFORMANCE	High Fire Input (BTU/h)	60,000	80,000	80,000	100,000	100,000	120,000
	Natural Gas	57,000	76,000	76,000	95,000	95,000	115,000
	LP Gas	57,000	76,000	76,000	95,000	95,000	115,000
	Low Fire Input (BTU/h)	39,000	52,000	52,000	70,000	70,000	84,000
	Natural Gas	37,000	49,000	49,000	67,000	67,000	80,500
	LP Gas	37,000	49,000	49,000	67,000	67,000	80,500
	AFUE	96	96	96	96	96	96
	Available AC @ 0.5"ESP	1.5/2/2.5/3	2.5/3/3.5/4	2.5/3/3.5/4	3.5/4/4.5/5	3.5/4/4.5/5	3.5/4/4.5/5
	Temperature Rise Range (°F)	30-60	35-65	35-65	35-65	35-65	40-70
STATIC PRESSURE (IN.W.C)	Heating	0.12	0.15	0.15	0.20	0.20	0.20
	Cooling	0.5	0.5	0.5	0.5	0.5	0.5
ELECTRICAL DATA	Voltage/Phase (60Hz}	115	115	115	115	115	115
	Min. / Max.Voltage (V)	104/127	104/127	104/127	104/127	104/127	104/127
	Min. Circuit Ampacity (MCA)	8	8	8	12	11	11
	Max. Overcurrent Protection	15	15	15	20	20	20
	(MOP) (A)	15	15	15	20	20	20
FAN MOTOR	Motor Type	ECM	ECM	ECM	ECM	ECM	ECM
	Horsepower (HP)	3/4	3/4	3/4	1/1	1/1	1/1
	Rated RPM	1050	1050	1050	1050	1050	1050
	Full Load Amps (FLA) (A)	8	8	8	12	11	11
	Capacitor (uF}	/	/	/	/	/	/
CIRCULATOR BLOWER	Material	Metal	Metal	Metal	Metal	Metal	Metal
	Size (Dx H) (in.)	12-3/8 X 8	12-3/8 X 8	12-6/8 X 11-1/4	12-6/8 X 11-1/4	12-6/8 X 11-1/4	12-6/8 X 11-1/4
	Vent Diameter (in.)	2/3	2/3	2/3	2/3	2/3	1/3
	No. of Burners	3	4	4	5	5	6
	Speed Mode Number	5	5	5	5	5	5

ComfortStar®

Air Conditioning & Heating Products

CG SERIES GAS FURNACE 96%



Comfort, it's in our name.

12201 N. W. 107TH AVENUE, MEDLEY, FL 33178
TOLL FREE: 1-866-524-9898 | PHONE: 305-500-9898 | FAX: 305-500-9896

All rights reserved. Printed in the United States of America. This publication is protected by Copyright and permission must be obtained by eAir, LLC prior to any reproduction or transmission in any form or by any means, electronic, mechanical, photocopying, recording or likewise. Warranty registration is not required in California.

GASFURNACE 2025

e-mail: info@comfortstarusa.com | www.comfortstarusa.com