

Air Handler Heat Pump System			
Location:		Approval:	
Engineer:		Date:	
Submitted to:		Construction:	
Submitted by:		Unit #:	
Reference:		Drawing #:	



INDOOR SPECIFICATION			
Indoor Air Flow (High/Low) (CFM)		605/512	
Indoor Noise Level (High/Low) (dBA)		49	
Dimension (W×D×H)	inch	20-15/32×14-61/64×36-1/32	
	mm	520×380×915	
Package (W×D×H)	inch	23-15/64×17-23/32×39-11/64	
	mm	580×436×995	
Net/Gross Weight	lbs	88/95	
	kg	39.9/43.1	

OUTDOOR SPECIFICATION			
Compressor Type		ROTARY	
Compressor Model		KTN210D60UMT3	
Refrigerant		R32	
Refrigerant Oil Charge(mL)		630	
Refrigerant Oil		VG74	
Outdoor Air Flow (Max) (CFM)		2100.0	
Outdoor Noise Level (dBA)		58	
Dimension (W×D×H)	inch	23-5/8×23-5/8×25	
	mm	600×600×635	
Package (W×D×H)	inch	25-63/64×25-63/64×26-3/16	
	mm	660×660×665	
Net/Gross Weight	lbs	111/118	
	kg	50.5/53.5	

EFFICIENCY			
Cooling		Heating	
SEER2	15.0	HSPF2-5	7.1
EER2	10.0	COP	3.50


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	6500~19000
Moisture Removal(L/h)	1.67
Standard Operating Range(*F/*C)	5~131(-15~55)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	19000
1. @ 47°F Min/Max Capacity	6800~21000
2. @ 17°F Rated	12500
3. @ 5°F Rated: Capacity / COP	17000/1.85
3. @ 5°F Max: Capacity	16000
Standard Operating Range(*F/*C)	-4~75(-20~24)
1. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor Operating at Max. Frequency	
Indoor: 70°F DB/60°F WB	
Outdoor: 5°F DB/5°F WB	

ELECTRICAL	
Indoor Power Supply	208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	1.5
Indoor MOP	3
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	16
Outdoor MOP	20
Communication Wiring	AWG 25×3 Shielded
Compressor RLA	8.4
Outdoor Fan Motor RLA	2.3
Outdoor Fan Motor W	200
Indoor Fan Motor RLA	1.19
Indoor Fan Motor W	100
System Power Input @ Cooling (W)	1800(600~1800)
System Power Input @ Heating (W)	1590(500~1860)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	Piston
Throttle type(Outdoor)	Capillary
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	98.4(30)
Max. Height Difference(ft/m)	65.6(20)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	65.26(1.85)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.52(48)
Connection Method	Welding

Indoor Unit Dimension

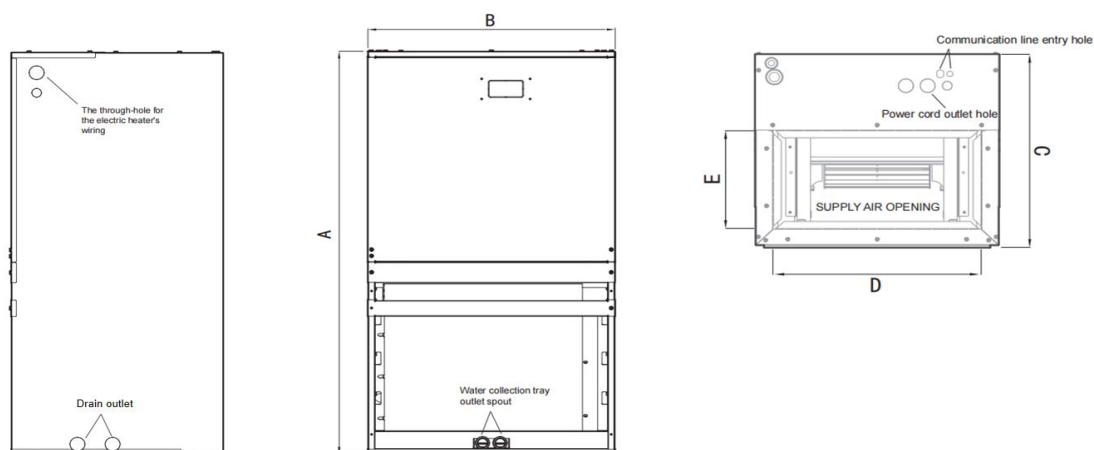


Dimensions		Model		18/24K		24/36K	
				inch	mm	inch	mm
A	Model Height			36-1/32	915	39-9/16	1005
B	Model width			20-15/32	520	22-3/64	560
C	Supply Air Opening width			14-61/64	380	19-3/32	485
D	Return Air Opening Width			17-33/64	445	18-57/64	480
E	Model Depth			9-29/64	240	9-27/32	250

Outdoor Unit Dimension

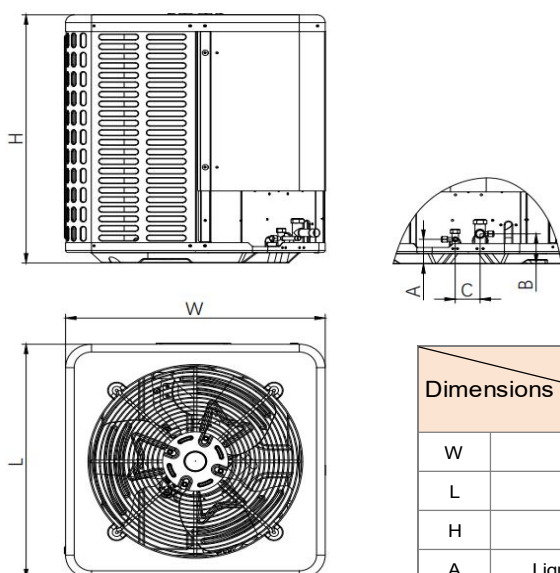


Dimensions		Model		18K/24K		30K/36K	
				inch	mm	inch	mm
W	Model width			23-5/8	600	29-9/64	740
L	Model length			23-5/8	600	29-9/64	740
H	Model height			25	635	25	635
A	Liquid side valve height			2-31/64	63	2-31/64	63
B	Distance between two valves			3-1/32	77	3-1/32	77
C	Gas side valve height			2-9/32	58	2-9/32	58

Installation Instruction For Outdoor Unit

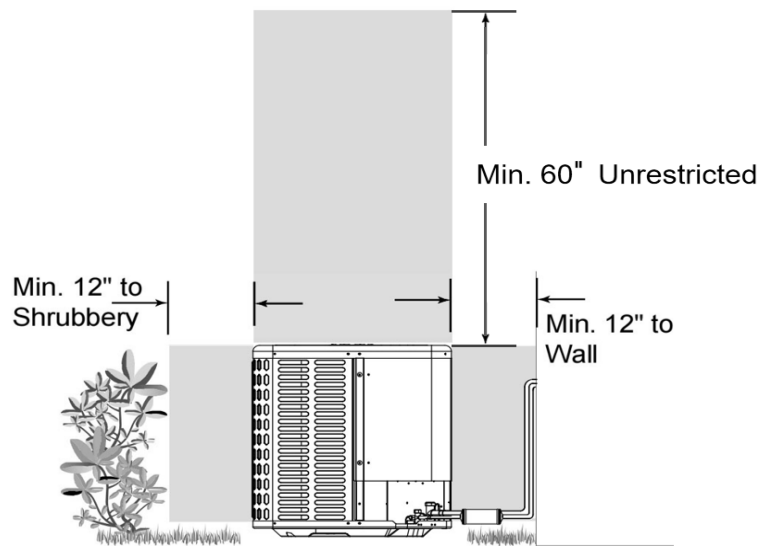

Fan Performance For Indoor Unit

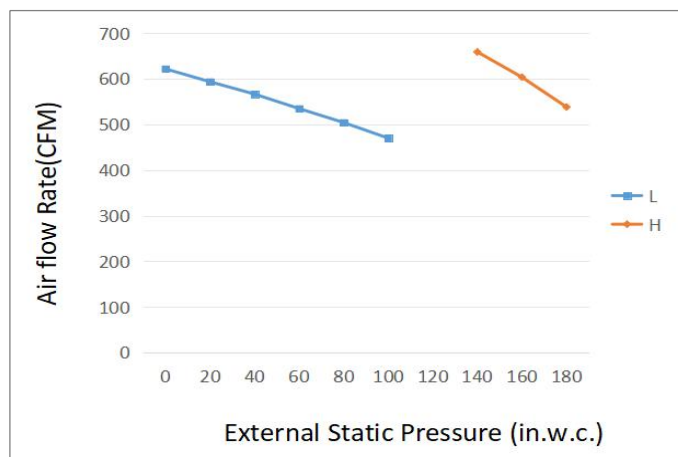

Features

- Front air intake, easy installation
- External static pressure up to 0.80 In.W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency(optional)
- Optional Auxiliary heat kit up to 20kW
- Easy Maintenance
- Multiple control options available:
 - Wired controller with built-in WiFi
 - Third-Party 24V Thermostat
- Adaptive Control System
- Crankcase heater equipped as standard