

Air Handler Heat Pump System			
Location:		Approval:	
Engineer:		Date:	
Submitted to:		Construction:	
Submitted by:		Unit #:	
Reference:		Drawing #:	



INDOOR SPECIFICATION			
Indoor Air Flow (High/Low) (CFM)		1160/930	
Indoor Noise Level (High/Low) (dBA)		52	
Dimension (W×D×H)	inch	22-1/8×19-1/16×39-41/64	
	mm	560×485×1005	
Package (W×D×H)	inch	24-21/64×21-9/64×42-53/64	
	mm	620×538×1085	
Net/Gross Weight	lbs	108/121	
	kg	48.9/54.3	

OUTDOOR SPECIFICATION			
Compressor Type		TWIN-ROTARY	
Compressor Model		KTM240D57UMT	
Refrigerant		R32	
Refrigerant Oil Charge(mL)		670	
Refrigerant Oil		VG74	
Outdoor Air Flow (Max) (CFM)		2650.0	
Outdoor Noise Level (dBA)		56	
Dimension (W×D×H)	inch	37-63/64×31-57/64×15-3/4	
	mm	965×810×400	
Package (W×D×H)	inch	42-1/8×34-41/64×20-43/64	
	mm	1070×880×525	
Net/Gross Weight	lbs	132/140	
	kg	60/63.5	

EFFICIENCY			
Cooling		Heating	
SEER2	15.0	HSPF2-5	6.9
EER2	9.0	COP	3.40


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	34200
Min/Max Capacity	13000~38000
Moisture Removal(L/h)	3.4
Standard Operating Range(*F/*C)	5~131(-15~55)
Rated Cooling Conditions:	
Indoor: 80°F DB/67°F WB	
Outdoor: 95°F DB/75°F WB	

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	36000
2. @ 47°F Min/Max Capacity	11000~39000
3. @ 17°F Rated	17500
4. @ 5°F Rated: Capacity / COP	23000/1.8
5. @ 5°F Max: Capacity	26000
Standard Operating Range(*F/*C)	-4~75(-20~24)
1. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:	
Indoor: 70°F DB/60°F WB	
Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor	
Indoor: 70°F DB/60°F WB	
Operating at Max. Frequency	
Outdoor: 5°F DB/5°F WB	

ELECTRICAL	
Indoor Power Supply	208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	2.8
Indoor MOP	3
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	25
Outdoor MOP	30
Communication Wiring	AWG 25×3 Shielded
Compressor RLA	9.45
Outdoor Fan Motor RLA	2.5
Outdoor Fan Motor W	150
Indoor Fan Motor RLA	2.23
Indoor Fan Motor W	220
System Power Input @ Cooling (W)	3800(460~3600)
System Power Input @ Heating (W)	3200(600~3600)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	Piston
Throttle type(Outdoor)	Capillary
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246(75)
Max. Height Difference(ft/m)	98.4(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	84.66(2.4)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.52(48)
Connection Method	Flared

Indoor Unit Dimension

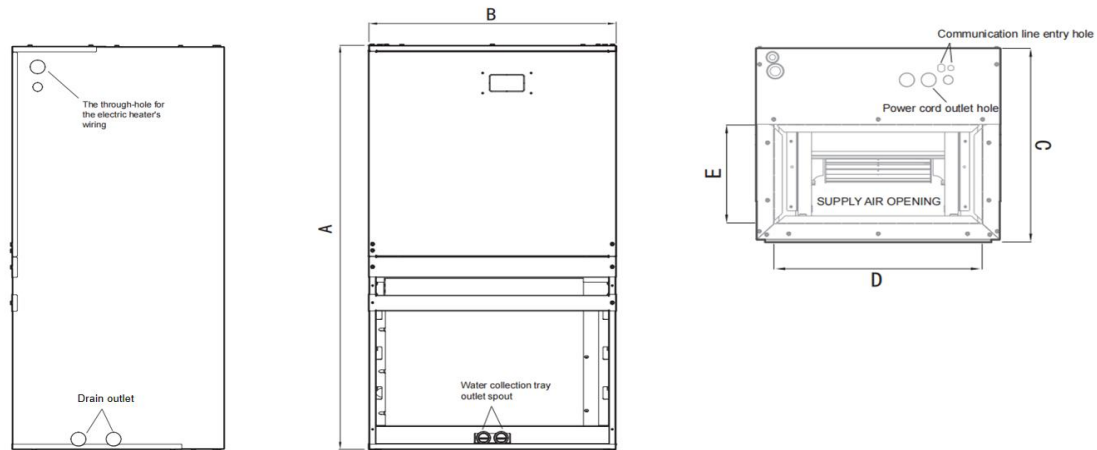


		Model	18K/24K	30K/36K
Dimensions			inch	inch
A	Model Height		36-1/32	39-41/64
B	Model Width		20-25/32	22-1/8
C	Supply Air Opening width		14-61/64	19-3/32
D	Return Air Opening width		17-33/64	18-57/64
E	Model Depth		15-13/64	19-1/16

Outdoor Unit Dimension

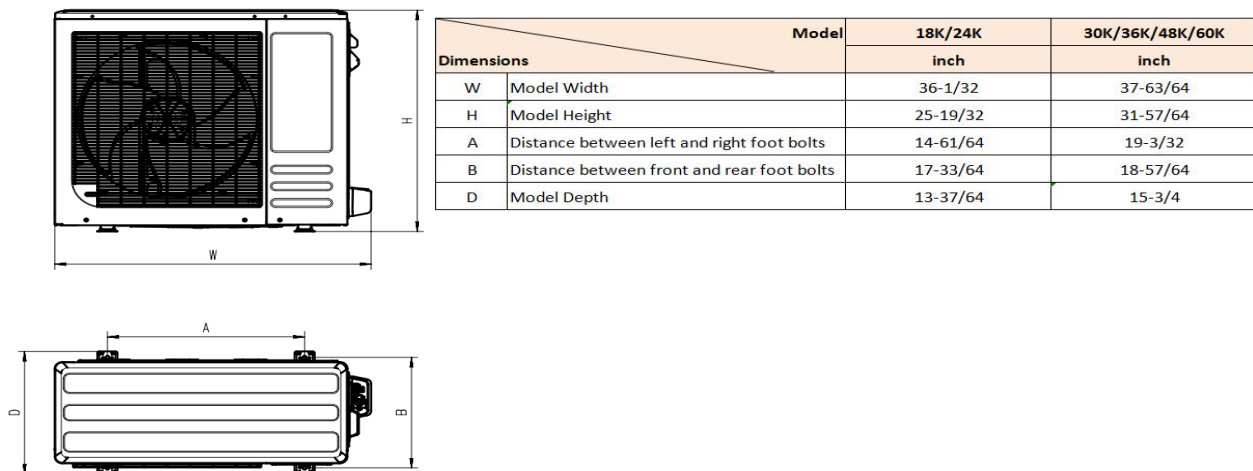


		Model	18K/24K	30K/36K/48K/60K
Dimensions			inch	inch
W	Model Width		36-1/32	37-63/64
H	Model Height		25-19/32	31-57/64
A	Distance between left and right foot bolts		14-61/64	19-3/32
B	Distance between front and rear foot bolts		17-33/64	18-57/64
D	Model Depth		13-37/64	15-3/4

Installation Instruction For Outdoor Unit

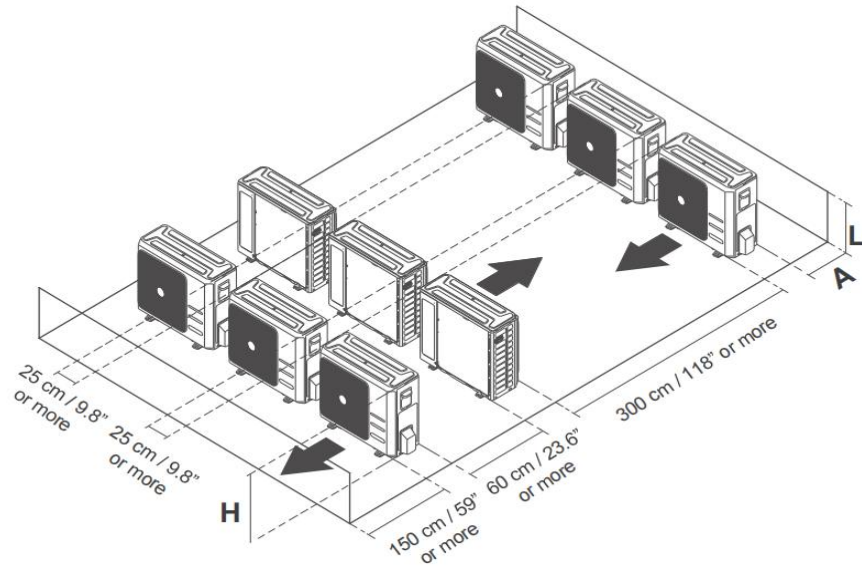

Fan Performance For Indoor Unit

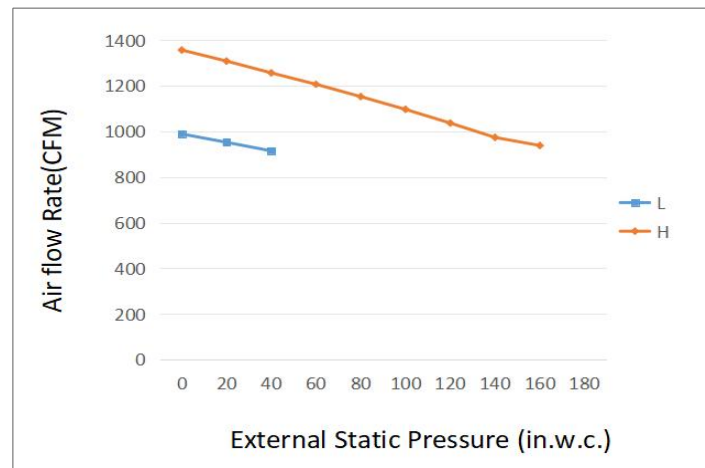

Features

- Front air intake, easy installation
- External static pressure up to 0.80 In.W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency(optional)
- Optional Auxiliary heat kit up to 20kW
- Easy Maintenance
- Multiple control options available:
 - Wired controller with built-in WiFi
 - Third-Party 24V Thermostat
- Adaptive Control System
- Crankcase heater equipped as standard