

Submittal

TAG: _____


PRODUCT NAME						
LOCATION						
ARCHITECT						
ENGINEER						
CONTRACTOR						
SUBMITTED BY	DATA					
UNIT SUMMARY						
Quantity						
Unit Designation						
Model No.						
Cooling Input						
Cooling Output						
CFM/ESP						
COP/HSPF						
Electrical						
Minimum Ampacity						
Max Overcurrent Protection						
Net Unit Weight						
Accessory						
Catalog Form Number						
ACCESSORIES	NOTES					

Condensing Unit

MRR60CD-16 Air Conditioner

Up to 16.0 SEER

Cooling capacity: 60 kBTU/h

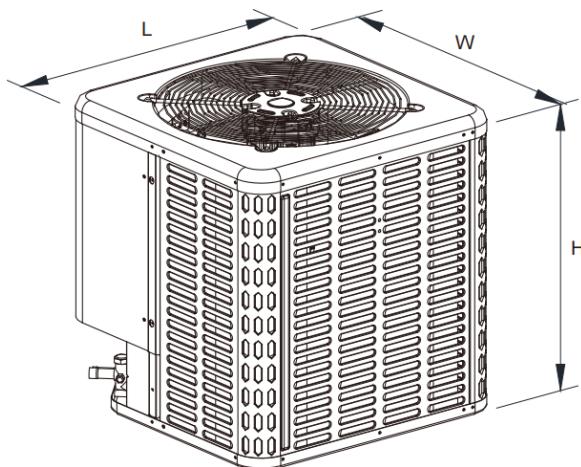

Model Size	Unit Width "W" in. [mm]	Unit Height "H" in. [mm]	Unit Length "L" in. [mm]	Packing (W*H*D) in. [mm]	Unit Weight (lbs.[kg])
36	23-5/8[600]	25[635]	23-5/8[600]	25-63/64×26-3/16×25-63/64 [660×660×665]	105.8[48.1]
60	29-9/64[770]	32-7/8[835]	29-9/64[770]	30-5/16×30-5/16×34-1/16 [770×770×865]	131.6[59.7]

Specifications

		MRR60CD-16
NOMINAL CAPACITY		
Cooling (BTU/h)		55000
ELECTRICAL DATA		
Voltage / Phase (60 Hz)		208/230V-1Ph
Min. / Max. Voltage (V)		187/253
Min. Circuit Amps (MCA) (A)		39
Max. Overcurrent Protection (MOP) (A)		40
COMPRESSOR		
Type		Rotary
Stage		Twin
Rated Load Amps (RLA) (A)		9.45
Locked Rotor Amps (LRA) (A)		/
Crankcase Heater		No
CONDENSER COIL		
Type		Tube & Fin
Tube Size (O.D) (in.)		13/64
FAN MOTOR		
Motor Type		BLDC
Capacitor (uF)		/
Horsepower (HP)		1/4
Full Load Amps (FLA) (A)		2.0
REFRIGERATION SYSTEM		
Liquid Valve Size (O.D.) (in.)		3/8
Suction Valve Size (O.D.) (in.)		5/8
Liquid Line Size ("O.D.) (in.)		3/8
Suction Line Size ("O.D.) (in.)		5/8
Refrigerant Charge (lbs. - oz.)		4 lbs. 7 OZ.
SOUND POWER (dB(A))		54
OPERATION RANGE		
Cooling (°C)		-15~55
Cooling (°F)		5~131
Service code		357

<p>Standard Features:</p> <ul style="list-style-type: none"> • Eco-friendly R32 refrigerant. • DC Inverter energy-efficient compressor. • High quality condenser with inner-groove copper tube and aluminum fin. • Refrigerant cooling PCB, high reliability • Factory-installed high-pressure switch and pressure sensor. 	<p>Cabinet Features:</p> <ul style="list-style-type: none"> • Compact design allows for ease of installation, clearance, durability, and maneuverability. • Powder-painted galvanized steel cabinet chassis. • Protective steel louvered coil guard. • Steel wire axial fan guard
--	--

ComfortStar®

Add.: 12201 N W 107th Avenue Miami, FL 33178

1.866.524.9898 Toll Free
 305.500.9898 Office
 305.500.9896 Fax document.
<http://www.comfortstarusa.com>