

Model Number: BAR17-24-15(40H) / CWM17-24-15(407)

Air Handler Heat Pump System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION	
Indoor Air Flow (High/Low) (CFM)	900/600
Indoor Noise Level (High/Low) (dBA)	53/46
Dimension (W×D×H)	inch 20-15/32×14-61/64×36-1/32
	mm 520×380×915
Package (W×D×H)	inch 23-15/64×17-23/32×39-11/64
	mm 580×436×995
Net/Gross Weight	lbs 88/95
	kg 39.9 / 43.1

OUTDOOR SPECIFICATION	
Compressor Type	ROTARY
Compressor Model	KSF200N1VKTB3
Refrigerant	R32
Refrigerant Oil Charge(mL)	640
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	2000.0
Outdoor Noise Level (dBA)	58
Dimension (W×D×H)	inch 119/126
	mm 54/57
Package (W×D×H)	inch 25-63/64×25-63/64×26-3/16
	mm 660×660×665
Net/Gross Weight	lbs 117/123
	kg 54/57


EFFICIENCY			
Cooling			
SEER2	14.3		
EER2	11.7		

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	24000
Standard Operating Range(°F)	23~125
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

ELECTRICAL	
Indoor Power Supply	208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	3.5
Indoor MOP	6
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	13
Outdoor MOP	15
Communication Wiring	AWG 12*3 Shielded
Compressor RLA	8.35
Outdoor Fan Motor RLA	2.3
Outdoor Fan Motor W	200
Indoor Fan Motor RLA	2.6
Indoor Fan Motor W	245
System Power Input @ Cooling (W)	1871
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	Piston
Throttle type(Outdoor)	Capillary
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	131(40)
Max. Height Difference(ft/m)	82(82)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	53(1.5)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.52(48)
Connection Method	Flared

Indoor Unit Dimension

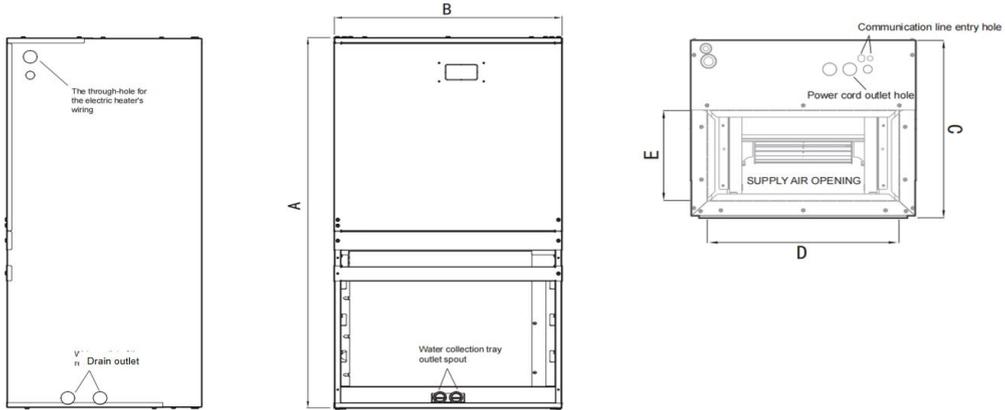


Dimensions		Model	18/24K		30/36K	
			inch	mm	inch	mm
A	Model Height		36-1/32	915	39-9/16	1005
B	Model width		20-25/32	520	22-3/64	560
C	Supply Air Opening width		14-61/64	380	19-3/32	485
D	Return Air Opening Width		17-33/64	445	18-57/64	480
E	Model Depth		9-29/64	240	9-27/32	250

Outdoor Unit Dimension

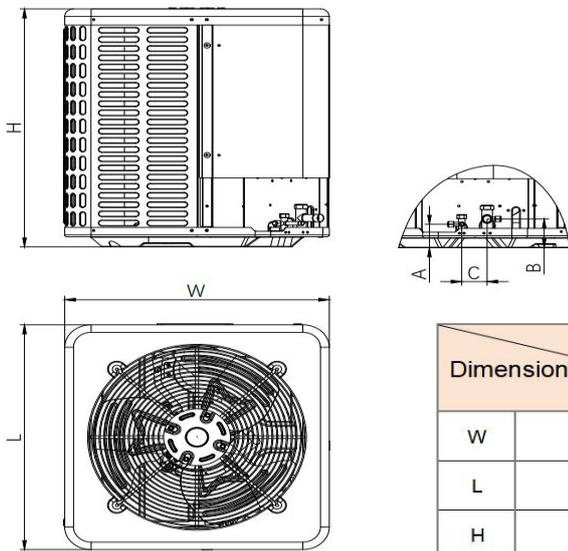


Dimensions		Model	18K/24K		30K/36K	
			inch	mm	inch	mm
W	Model width		23-5/8	600	29-9/64	740
L	Model length		23-5/8	600	29-9/64	740
H	Model height		25	635	25	635
A	Liquid side valve height		2-31/64	63	2-31/64	63
B	Distance between two valves		3-1/32	77	3-1/32	77
C	Gas side valve height		2-9/32	58	2-9/32	58

Installation Instruction For Outdoor Unit

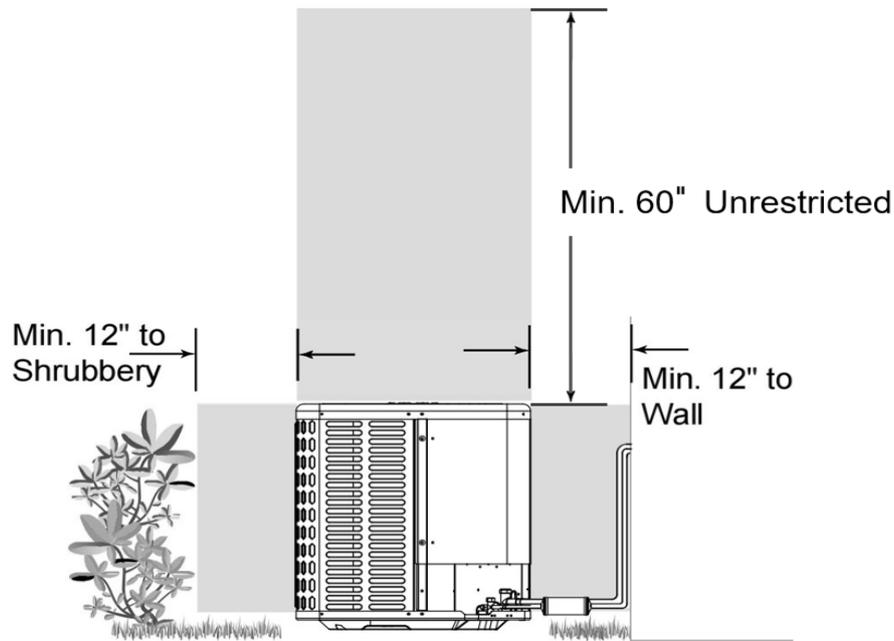

Fan Performance For Indoor Unit

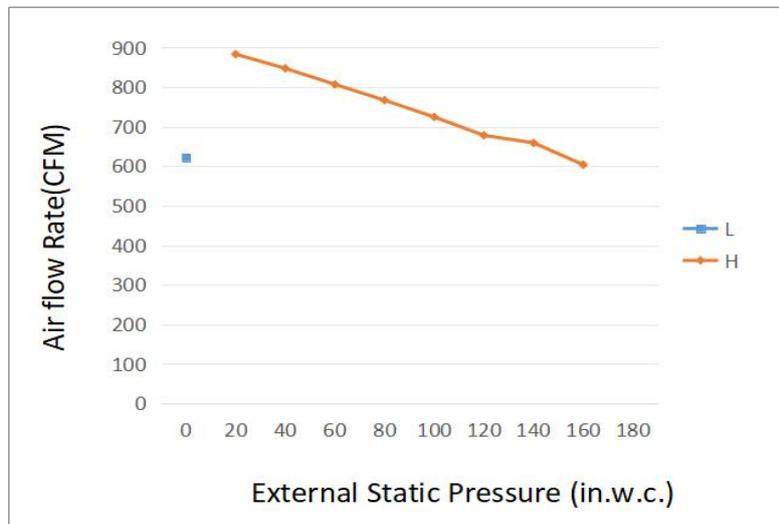

Features

- Multi-position installation: horizontal(left or right), vertical(up or down)
- ECM fan motor with constant torque technology
- External static pressure up to 0.80 In.W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency(optional)
- Optional Auxiliary heat kit up to 20kW
- Easy Maintenance
- Multiple control options available:
 - Wired controller with built-in WiFi
 - Third-Party 24V Thermostat
- Adaptive Control System