

Submittal

TAG:

PRODUCT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
SUBMITTED BY _____ DATA _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Cooling Input						
Cooling Output						
CFM/ESP						
COP/HSPF						
Electrical						
Minimum Ampacity						
Max Overcurrent Protection						
Net Unit Weight						
Accessory						
Catalog Form Number						


ACCESSORIES

NOTES

Cassette Unit

10seer series

Cooling capacity: 48 kBTU/h

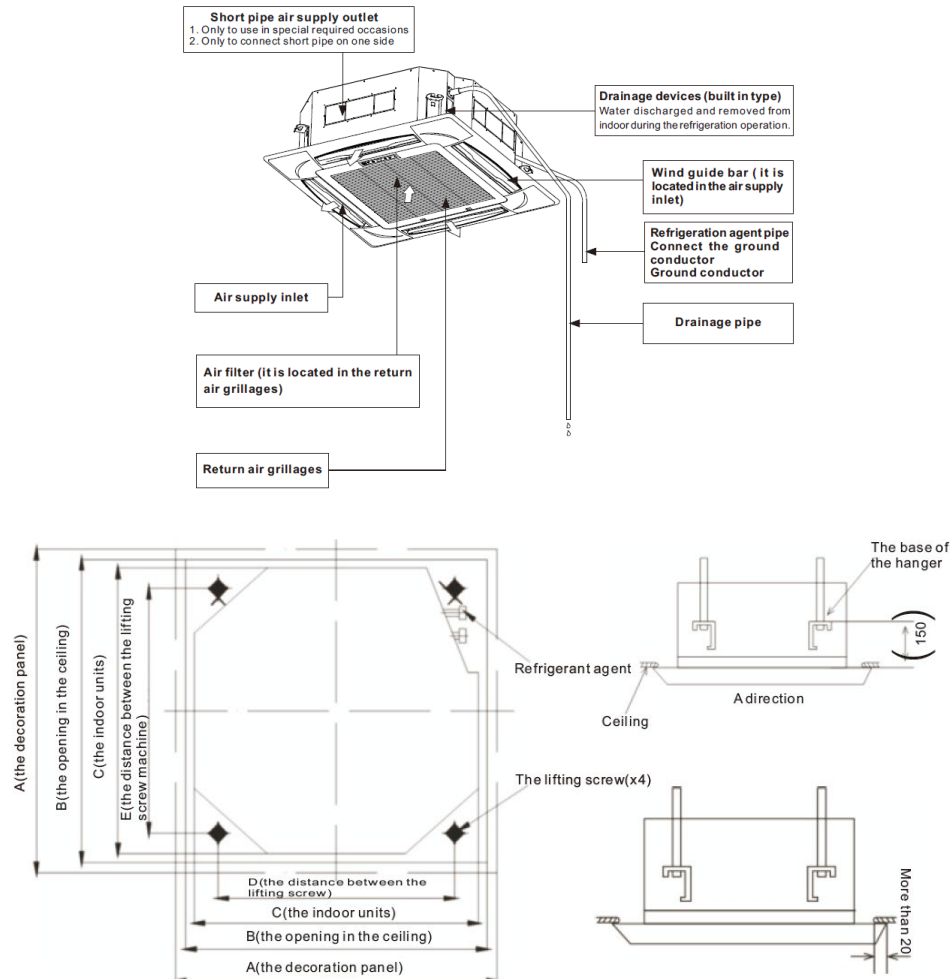

Model (kBtu/h)	Dimensions(H)				
	A	B	C	D	E
For 18, 24, 36, 48, 60 series	950	890*	840	680	780

Specifications

Model			CCT48-24-C
Indoor power supply		V/Ph/Hz	208~230/1/60
Cooling	Capacity	Btu/h	48000
		W	14064
	Input	W	5566
	Rated current	A	25.84
	EER	W/W	2.53
		Btu/h	8.6
Indoor fan motor	Input	W	160
	Capacitor	μF	4
	Speed(Hi/Me/Lo)	r/min	800/750/650
Indoor coil	Number of rows		2
	Tube pitch(a)xrow pitch(b)	mm	21×13.37
	Fin spacing	mm	1.45
	Fin type		Hydrophilic
	Tube outside dia. and type	mm	Φ7
			inner grooved
	Number of circuits		12
Indoor air flow(High speed)		m³/h	1900
		CFM	1118
Indoor noise level		dB(A)	51～57
Indoor unit	Dimension(W*D*H)	Body(inch)	33.1x33.1x11.2
		Panel(inch)	37.4x37.4x2.0
	Packing(W*D*H)	Body(inch)	36.2x36.2x14.8
		Panel(inch)	40.6x40.6x4.1
	Net/Gross weight	lbs	68.4/77.2
		Panel(lbs)	11.9/17.7
Max pressure		MPa	4.5
Refrigerant type			R410A
Refrigerant piping(Liquid side/Gas side)		inch	3/8"/3/4"
Drainage pipe		inch	1
Operation temp		°F	61~90
Application area		m²	55~95
Service code			0SH

Standard Features:

- Eco-friendly R410A refrigerant with low GWP value.
- Energy-efficient compressor.
- Equipped with thermal overload protection.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Service valves with sweat connections and easy-access gauge ports.
- Factory-installed high-pressure switch..

Cabinet Features:

- Compact design allows for ease of installation, clearance, durability, and maneuverability.
- .

ComfortStar®

Add.: 12201 N W 107th Avenue Miami, FL 33178

1.866.524.9898 Toll Free

305.500.9898 Office

305.500.9896 Fax document.

<http://www.comfortstarusa.com>