

Submittal

TAG:

PRODUCT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
SUBMITTED BY _____ DATA _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Cooling Input						
Cooling Output						
CFM/ESP						
COP/HSPF						
Electrical						
Minimum Ampacity						
Max Overcurrent Protection						
Net Unit Weight						
Accessory						
Catalog Form Number						


ACCESSORIES

NOTES

Cassette Unit

10seer series

Cooling capacity: 60 kBTU/h

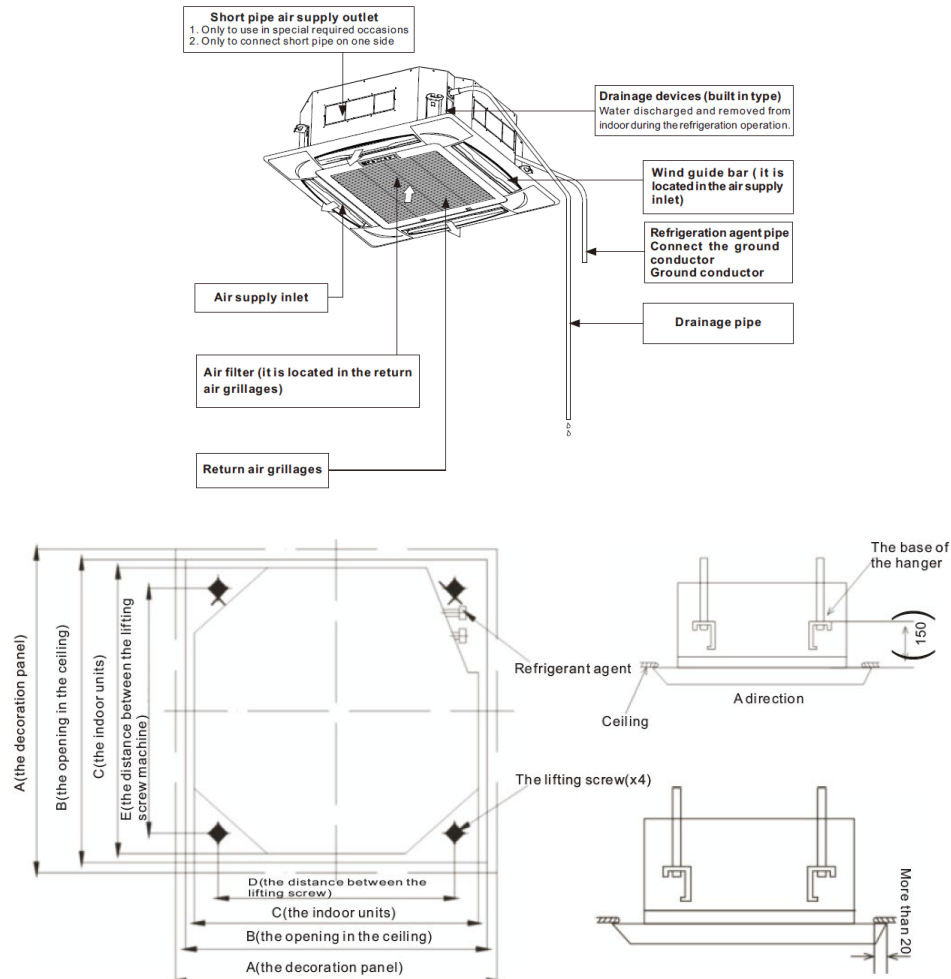

Model (kBtu/h)	Dimensions(H)				
	A	B	C	D	E
For 18, 24, 36, 48, 60 series	950	890*	840	680	780

Specifications

			CCT60-24-C
Indoor power supply		V/Ph/Hz	208~230/1/60
	Actual Capacity	W	13250
	Actual Input	W	5131
	Rated current	A	29.23
	Input(Indoor unit)	W	180
	Rated current(Indoor unit)	A	0.8
	SEER	Btu/h.W	8.81
	EER (A)	Btu/h.W	8.00
max input(indoor and outdoor unit)		W	6912
MCA		A	3.00
MOP		A	5.00
Indoor fan motor	Brand		KAIBANG
	Model		S.TB-DQ-YDK-80Q-8P2
	Input	W	160
	Capacitor	μF	4
	Speed(Hi/Me/Lo)	r/min	800/750/650
Indoor coil	Number of rows		2
	Tube pitch(a)xrow pitch(b)	mm	21×13.37
	Fin spacing	mm	1.45
	Fin type		Hydrophilic
	Tube outside dia. and type	mm	Φ7
			inner grooved
	Number of circuits		12
Indoor air flow(High speed)		m³/h	1900
Indoor noise level		dB(A)	51~57
Indoor unit	Dimension(W*D*H)	Body(mm)	840×840×285
		Panel(mm)	950×950×50
	Packing(W*D*H)	Body(mm)	920×920×310
		Panel(mm)	1030×1030×105
	Net/Gross weight	Body(Kg)	31/35
		Panel(Kg)	5.4/8.0
Max pressure		MPa	4.5
Refrigerant type			R410A
Refrigerant piping	Liquid side/Gas side	mm	Φ9.52/Φ19.05
Drainage pipe		mm	25
Standard controller			
Power wiring		mm²	3×1.0
Operation temp		℃	16~32
Ambient temp		℃	18~43
Application area		m²	60~105
Stuffing Quantity(20'/40'/40'HQ)		set	65/130/150

Standard Features:

- Eco-friendly R410A refrigerant with low GWP value.
- Energy-efficient compressor.
- Equipped with thermal overload protection.
- High quality condenser with inner-groove copper tube and aluminum fin.
- Service valves with sweat connections and easy-access gauge ports.
- Factory-installed high-pressure switch..

Cabinet Features:

- Compact design allows for ease of installation, clearance, durability, and maneuverability.
- .

ComfortStar®

Add.: 12201 N W 107th Avenue Miami, FL 33178

1.866.524.9898 Toll Free

305.500.9898 Office

305.500.9896 Fax document.

<http://www.comfortstarusa.com>