


ComfortStar®

Air conditioning and Heating

DKP Series

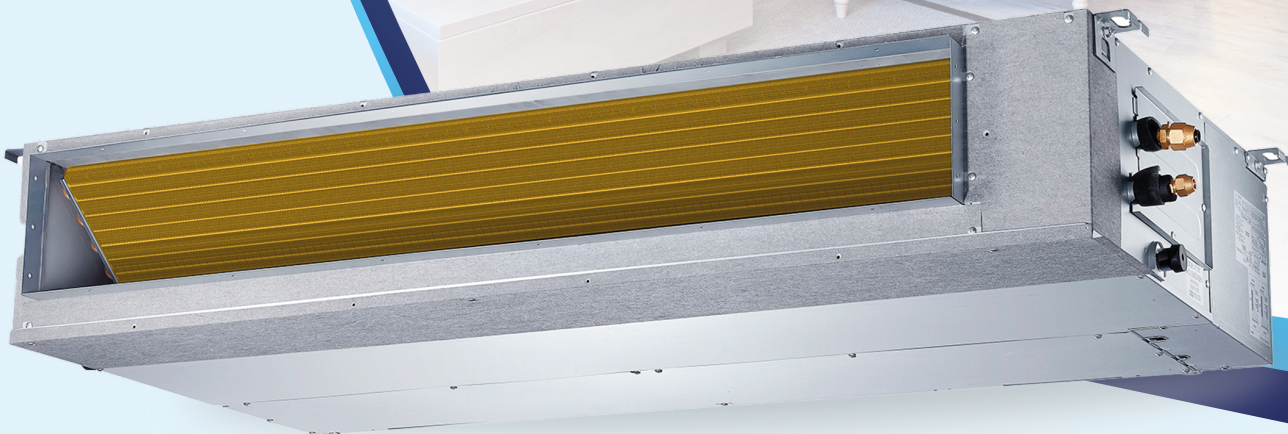

HORIZONTAL CASED FAN COIL

FEATURES:

- Slim Body Concealed Installation
- Easy Installation
- 3 Fan Speed
- Easy Maintenance
- Includes Wired Controller with Follow me

***Quality
and Design***

Comfort... it's in our name




📍 12201 N. W. 107th Avenue,
Medley, FL 33178

☎ Toll Free: 1-866-524-9898
Phone: 1-305-500-9898
Fax: 1-305-500-9896

🌐 www.comfortstarusa.com
www.smartelectricusa.com

DKP Series

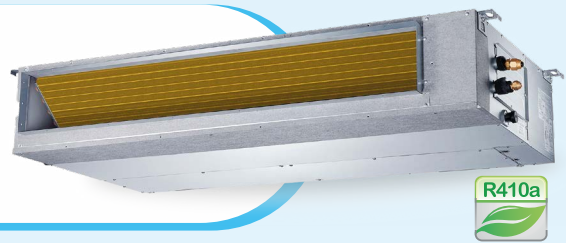

Indoor Factory model			DKP24-1	DKP36-1	DKP48-1	DKP60-1
Power supply (Indoor)			V- ph-hz	220-230V,1Ph, 60Hz	220-230V,1Ph, 60Hz	220-230V,1Ph, 60Hz
Cooling (Standard conditions)	Capacity	Btu/h	24000	36000	48000	60000
	Input	W	3994	3994	5369	6712
	Current	A	18.46	18.46	29.20	29.20
	EER	W/W	2.64	2.64	2.62	2.62
Rated Power Input			W	5400	5400	7625
Rated Current			A	25.5	25.5	34.6
Starting current			A	89	89	139
Indoor fan motor	Model		YKSS-115-4-21	YKSS-115-4-21	YKSS-480-4-2	YKSS-480-4-2
	Input	W	253.0	253.0	/	
	Capacitor	uF	8	8	20	20
	Speed(Hi/Mi/Lo)	r/min	1150/990/870/760	1150/990/870/760	12010/1040/900/800	12010/1040/900/800
Indoor coil	a.Number of rows		3.0	3.0	4.0	4.0
	b.Tube pitch(a)x row pitch(b)	mm	21X13.37	21X13.37	21X13.37	21X13.37
	c.Fin spacing	mm	1.4	1.4	1.5	1.5
	d.Fin type (code)		Hydrophilic aluminum	Hydrophilic aluminum	Hydrophilic aluminum	Hydrophilic aluminum
	e.Tube outside dia.and type	mm	7, Inner groove tube	7, Inner groove tube	7, Inner groove tube	7,Inner groove tube
	f.Coil length x height x width	mm	915x294x40.11	915x294x40.11	1030x378x53.48	1030x378x53.48
	g.Number of circuits		7	7	8	8
Indoor air flow (Hi/Mi/Lo)			m3/h	1725/1193/991	1725/1193/991	2604/2180/1885
ESP	Rated	Pa	37	37	50	50
	Range	Pa	0-160	0-160	0-160	0-160
Indoor noise level (Hi/Mi/Lo)			dB(A)	49.8/42.3/40	49.8/42.3/40	52.4/49.7/46.9
Throttle type			/	Throttle valve	Throttle valve	Throttle valve
Indoor unit	Dimension(W*D*H)	mm	1100x774x249	1100x774x249	1200x874x300	1200x874x300
	Packing (W*D*H)	mm	1305x805x315	1305x805x315	1405x915x365	1405x915x365
	Net/Gross weight	kg	33.7/41	33.7/41	48.8/57.9	48.8/57.9
Drainage water pipe dia			mm	OD 25mm	OD 25mm	OD 25mm
Qty'per 20' /40' /40'HQ			Indoor unit	77/161/198	77/161/198	62/130/149

ComfortStar®
Air conditioning and Heating

Comfort... it's in our name



12201 N. W. 107th Avenue,
Medley, FL 33178

Toll Free: 1-866-524-9898
Phone: 1-305-500-9898
Fax: 1-305-500-9896

www.comfortstarusa.com
www.smartelectricusa.com