



Submittal

Split System Cooling

96M080C4B

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit # : _____
Drawing # : _____



Note: "Graphics in this document are for representation only. Actual model may differ in appearance."



Unit dimension

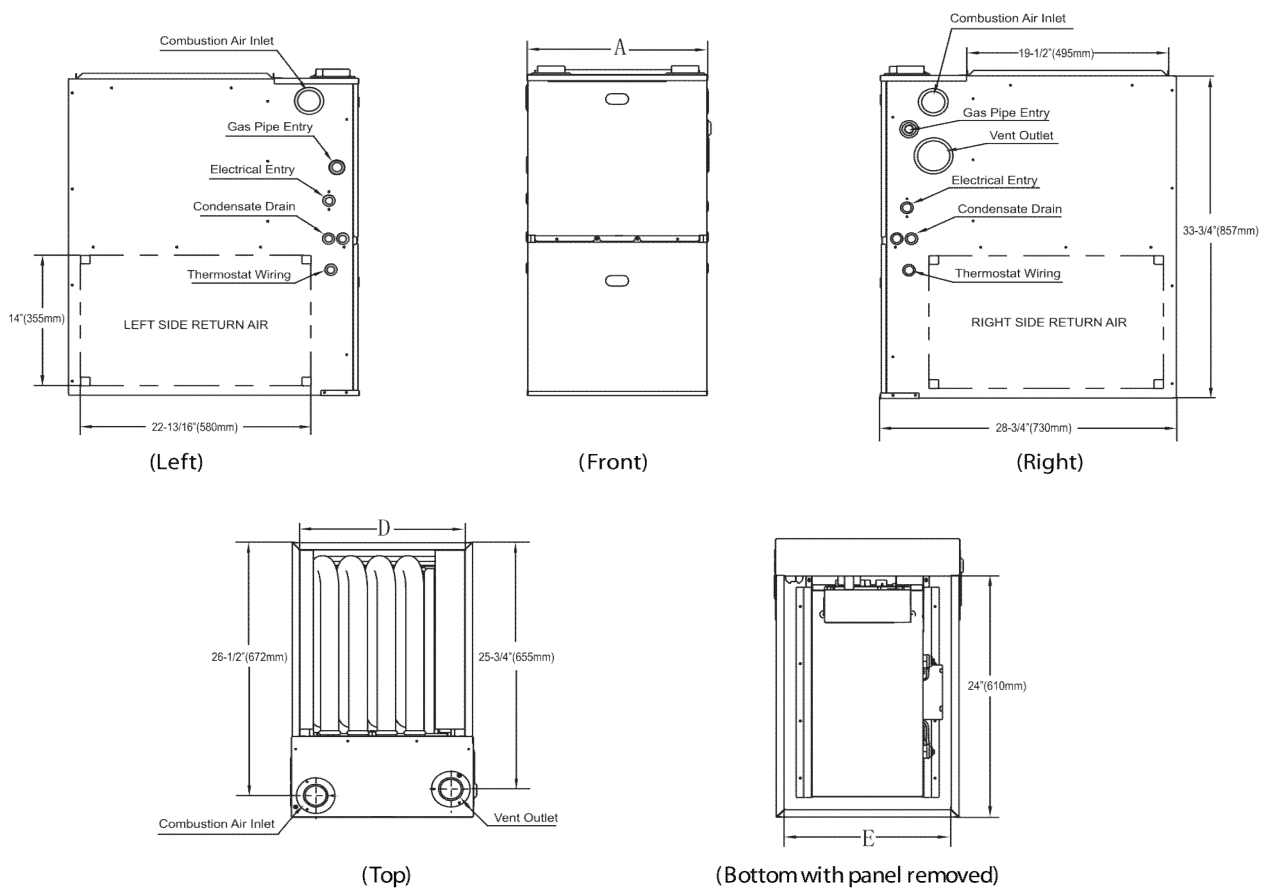


Fig. 1 - Dimensional Drawing

Table 1 - Dimensions

FURNACE SIZE	A CABINET WIDTH IN. (MM)	D SUPPLY- AIR WIDTH IN. (MM)	E RETURN- AIR WIDTH IN. (MM)	NET/SHIP WT (lbs)
60B3B	17.5 (445)	16 (406)	15-27/32 (402)	135/147.5
80B3B	17.5 (445)	16 (406)	15-27/32 (402)	141/153
80C4B	21 (533)	19.5 (495)	19-13/32 (493)	152/165
100C5B	21 (533)	19.5 (495)	19-13/32 (493)	162/173
100D5B	24.5 (622)	23 (584)	22-27/32 (580)	170/185
120D5B	24.5 (622)	23 (584)	22-27/32 (580)	176/190



Specification

Model			96M080C4B
Fuel Type		-	Natural Gas/Propane Gas
AFUE		%	96
Input	NG/LP(HIGH)	Btu/h	80000
	NG/LP(LOW)	Btu/h	52000
Output	NG/LP(HIGH)	Btu/h	760000
			222680
	NG/LP(LOW)	Btu/h	49000
Air Temperature Rise		°F	35-65
Design Max. Outlet Air Temperature		°F	165
Certified EXT static pressure	Heating	in. WC	0.15
	Cooling	in. WC	0.5
Circulating Blower	Material	-	Metal
	Type	-	x13 ECM
	Diameter blower wheel	Inch	12.8
	Height blower wheel	Inch	11.22
Tons AC @ 0.5" ESP		tons	2.5/3/3.5/4
Circulating Fan Motor	Motor Horsepower	HP	3/4
Air Flow (0.5 ESP in. WC)	High	CFM	1312
Air Flow (0.5 ESP in. WC)	Mid-High	CFM	1092
Air Flow (0.5 ESP in. WC)	Mid	CFM	894
Air Flow (0.5 ESP in. WC)	Mid-Low	CFM	625
Air Flow (0.5 ESP in. WC)	Low	CFM	455
Motor Speeds		# speeds	5
		r/min	1050 (rated)
Power Input	(High)	W	63±10%
Power Input	(Low)	W	37±10%
Max. Inlet Gas Press	Natural Gas	in. WC	10.5
	Propane Gas (LP)	in. WC	13
Min. Inlet Gas Press	Natural Gas	in. WC	4.5
	Propane Gas (LP)	in. WC	11
Flue Vent Diameter		Inch	2"3"
Power supply		V/Hz/PH	115V/60HZ/1PH
Max Overcurrent Protection (MOP)		Amps	15
MAS.Unit Amps		Amps	7.8
Packing Dimension (without pallet)		Inch	(23-1/2)*(31)*(35-1/2)
Packing Dimension (with pallet)		Inch	(23-1/2)*(31)*(40)
Net Weight (unit only)		lbs	152
Gross Weight		lbs	184.6

ComfortStar®

12201 N W 107th Avenue
Miami, FL 33178
1.866.524.9898 Toll Free
305.500.9898 Office
305.500.9896 Fax
<http://www.comfortstarusa.com>



The AHRI mark indicates Comfortstar participating in the AHRI Certification program. Visit ahridirectory.org for verification of individual certified products. Comfortstar reserves the right to change design and specs without notice. Comfortstar has a policy of update the data continuously. We are committed to using environmentally conscious print practices.

96M080C4B 23 Oct. 2023
Supersedes 96M080C4B (Oct.2023)

© 2023 ComfortStar